

(12) UK Patent Application (19) GB (11) 2 359 954 (13) A

(43) Date of A Publication 05.09.2001

(21) Application No 0031099.5

(22) Date of Filing 20.12.2000

(30) Priority Data

(31) 11369141 (32) 27.12.1999 (33) JP

(71) Applicant(s)

Hitachi, Ltd.
(Incorporated in Japan)
6 Kanda Surugadai 4-chome, Chiyoda-ku, Tokyo,
Japan

(72) Inventor(s)

Takafumi Miyatake
Shigeki Nagaya
Akio Nagasaka
Takehiro Fujita

(74) Agent and/or Address for Service

Mewburn Ellis
York House, 23 Kingsway, LONDON, WC2B 6HP,
United Kingdom

(51) INT CL⁷

H04N 7/18

(52) UK CL (Edition S)

H4F FAAE

G4N NFFV N2V1

(56) Documents Cited

GB 2183878 A

GB 2150724 A

EP 0183106 A2

US 5880775 A

(58) Field of Search

UK CL (Edition S) G1A AAJP , G4N NFFV , H4F FAAE
FAAX FDG FGM

INT CL⁷ G08B 13/194 13/196 , H04N 7/18


Online: WPI,EPDOC,PAJ,TXTE

(54) Abstract Title

Surveillance device detecting scene changes

(57) A surveillance apparatus is arranged to detect changes in the observed scene on the basis of a comparison of the viewed scene with a previously stored image of the scene. The apparatus comprises an image input means for sequentially supplying a series of images (173) and a background image memory unit for storing a plurality of images (174). An image difference calculation unit determines the degree of difference between a stored image and a newly input image before a judgement means decides whether the observed scene has changed, based upon the degree of difference between the two images. Also disclosed is a recording medium comprising a computer program arranged to carry out the above method.

FIG.1

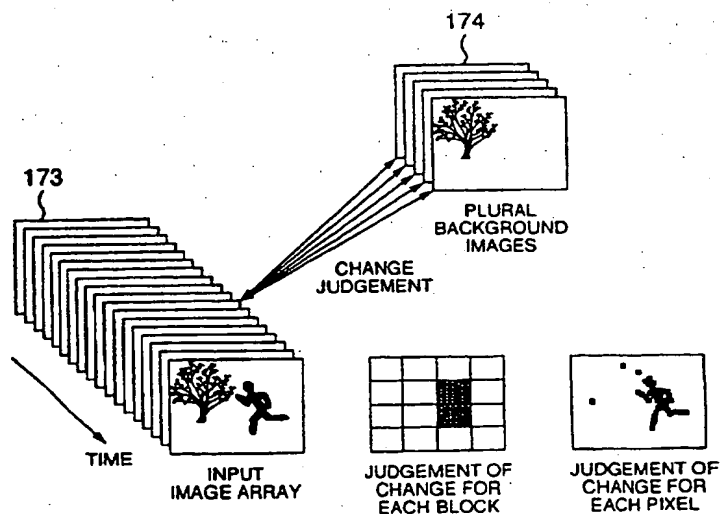

GB 2 359 954 A

FIG.1

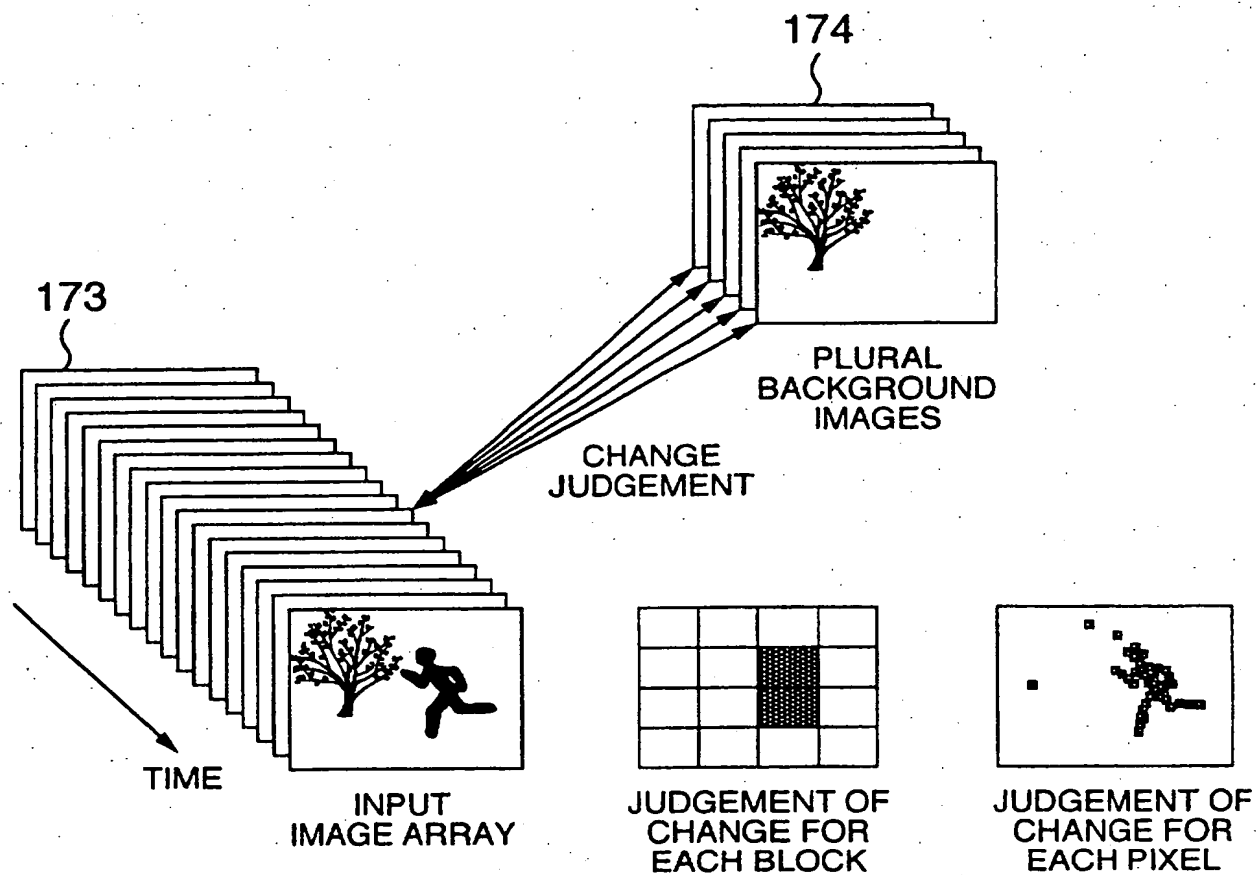


FIG.2

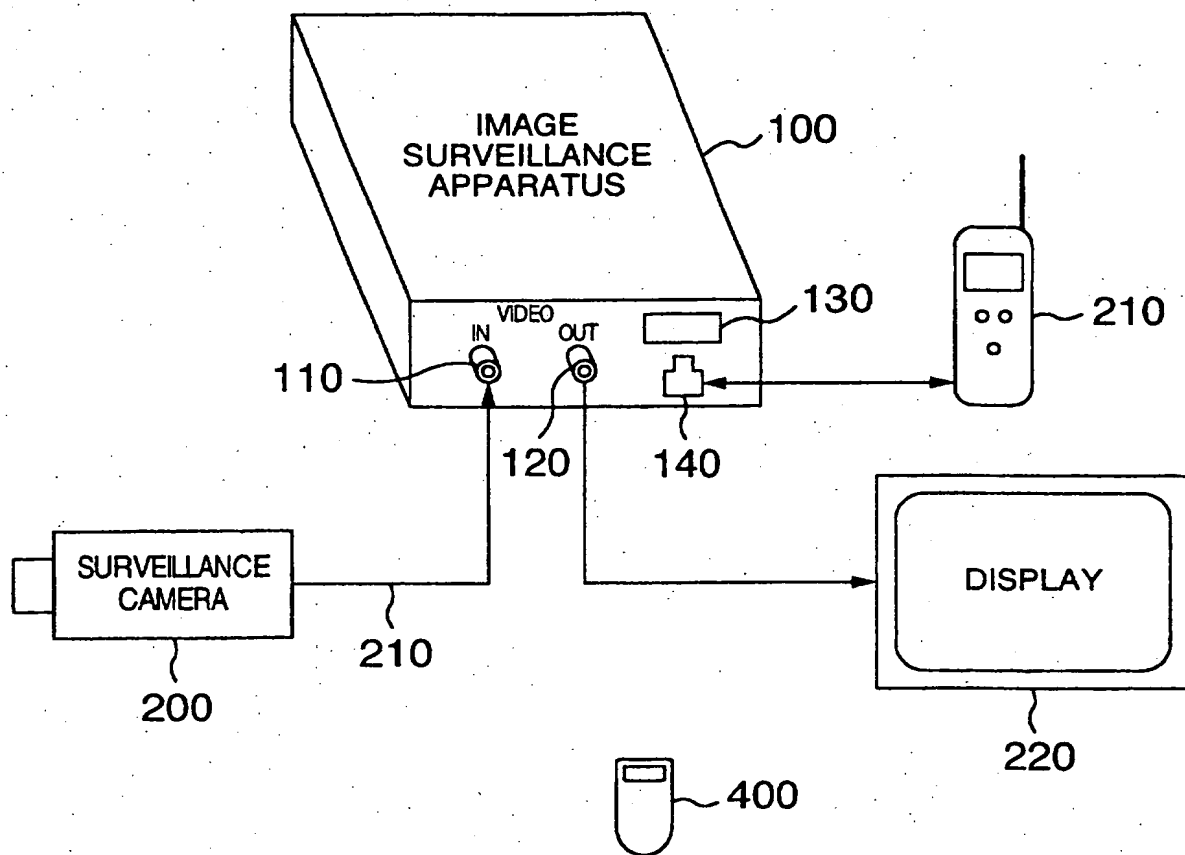


FIG.3

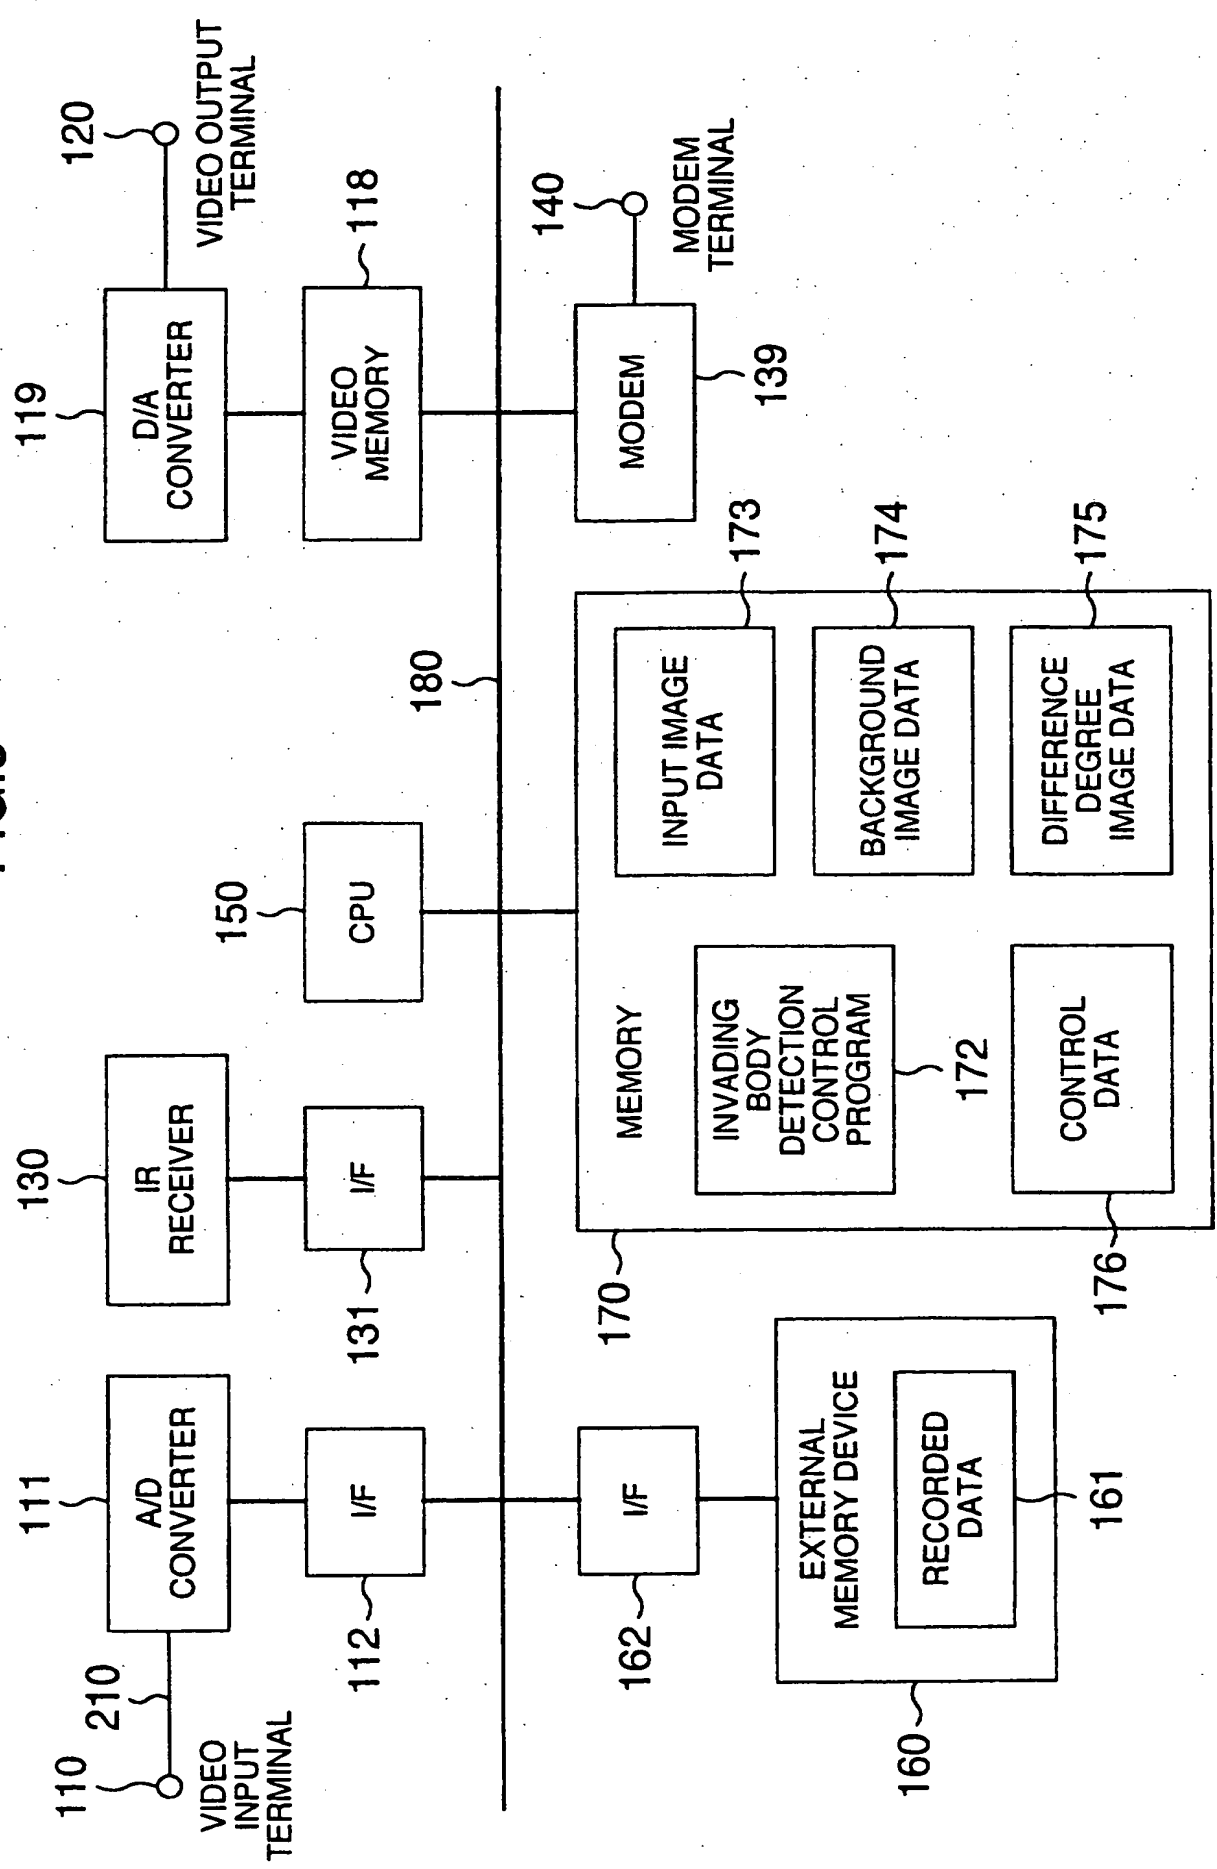


FIG.4

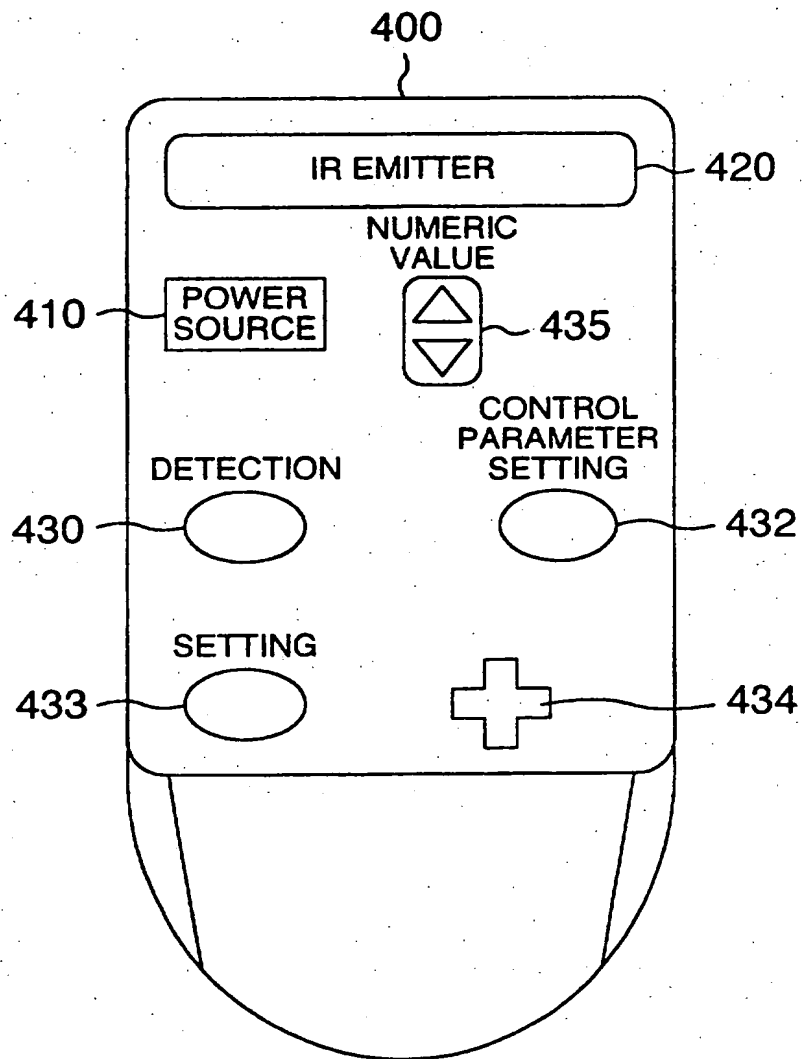


FIG.5

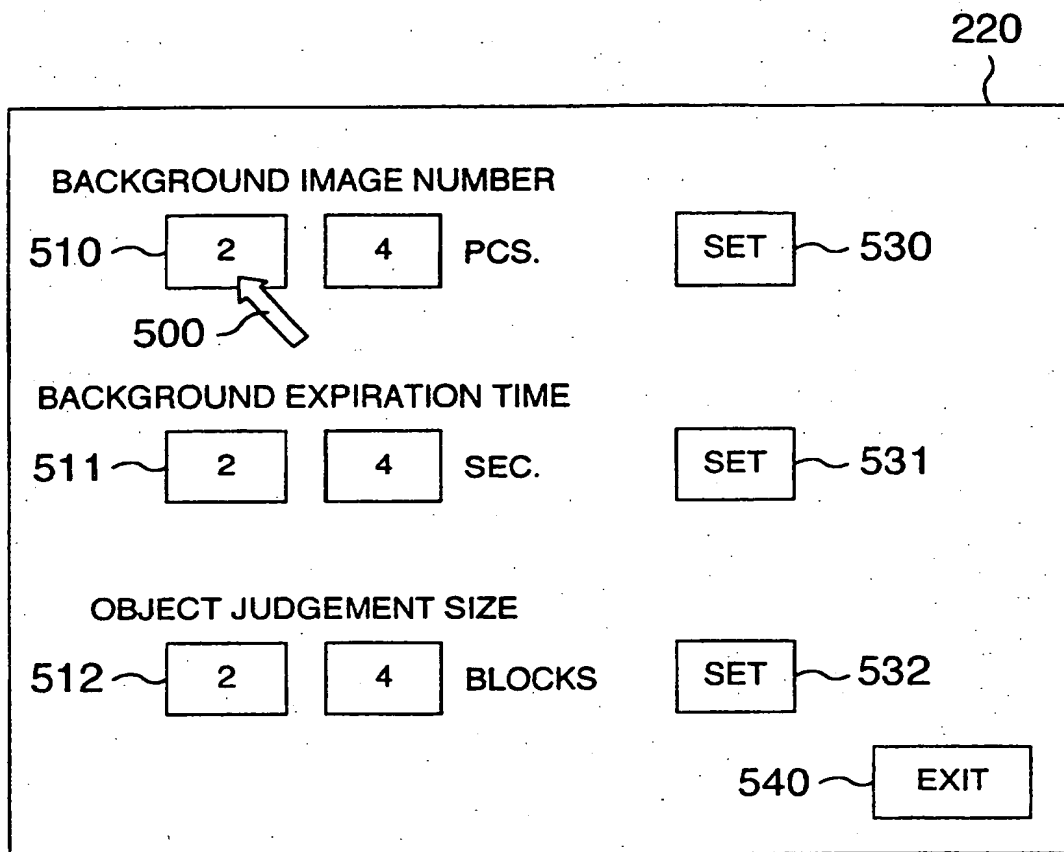


FIG. 6

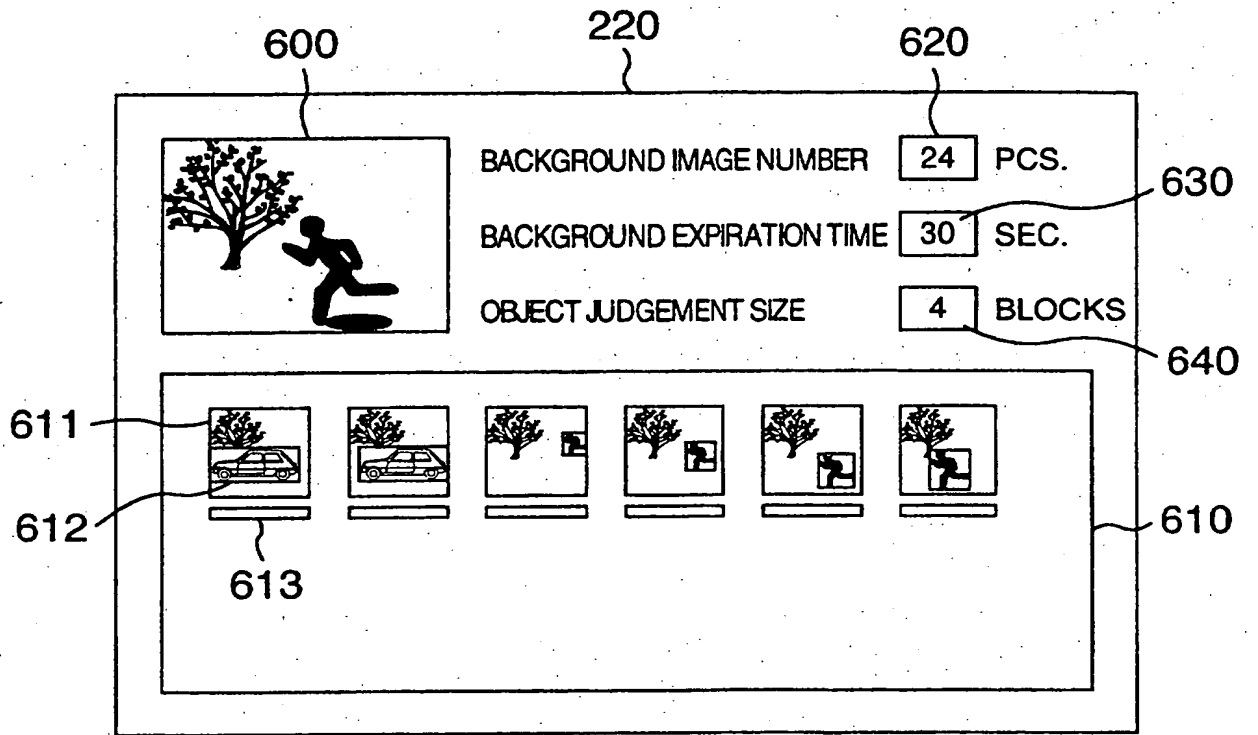


FIG. 7

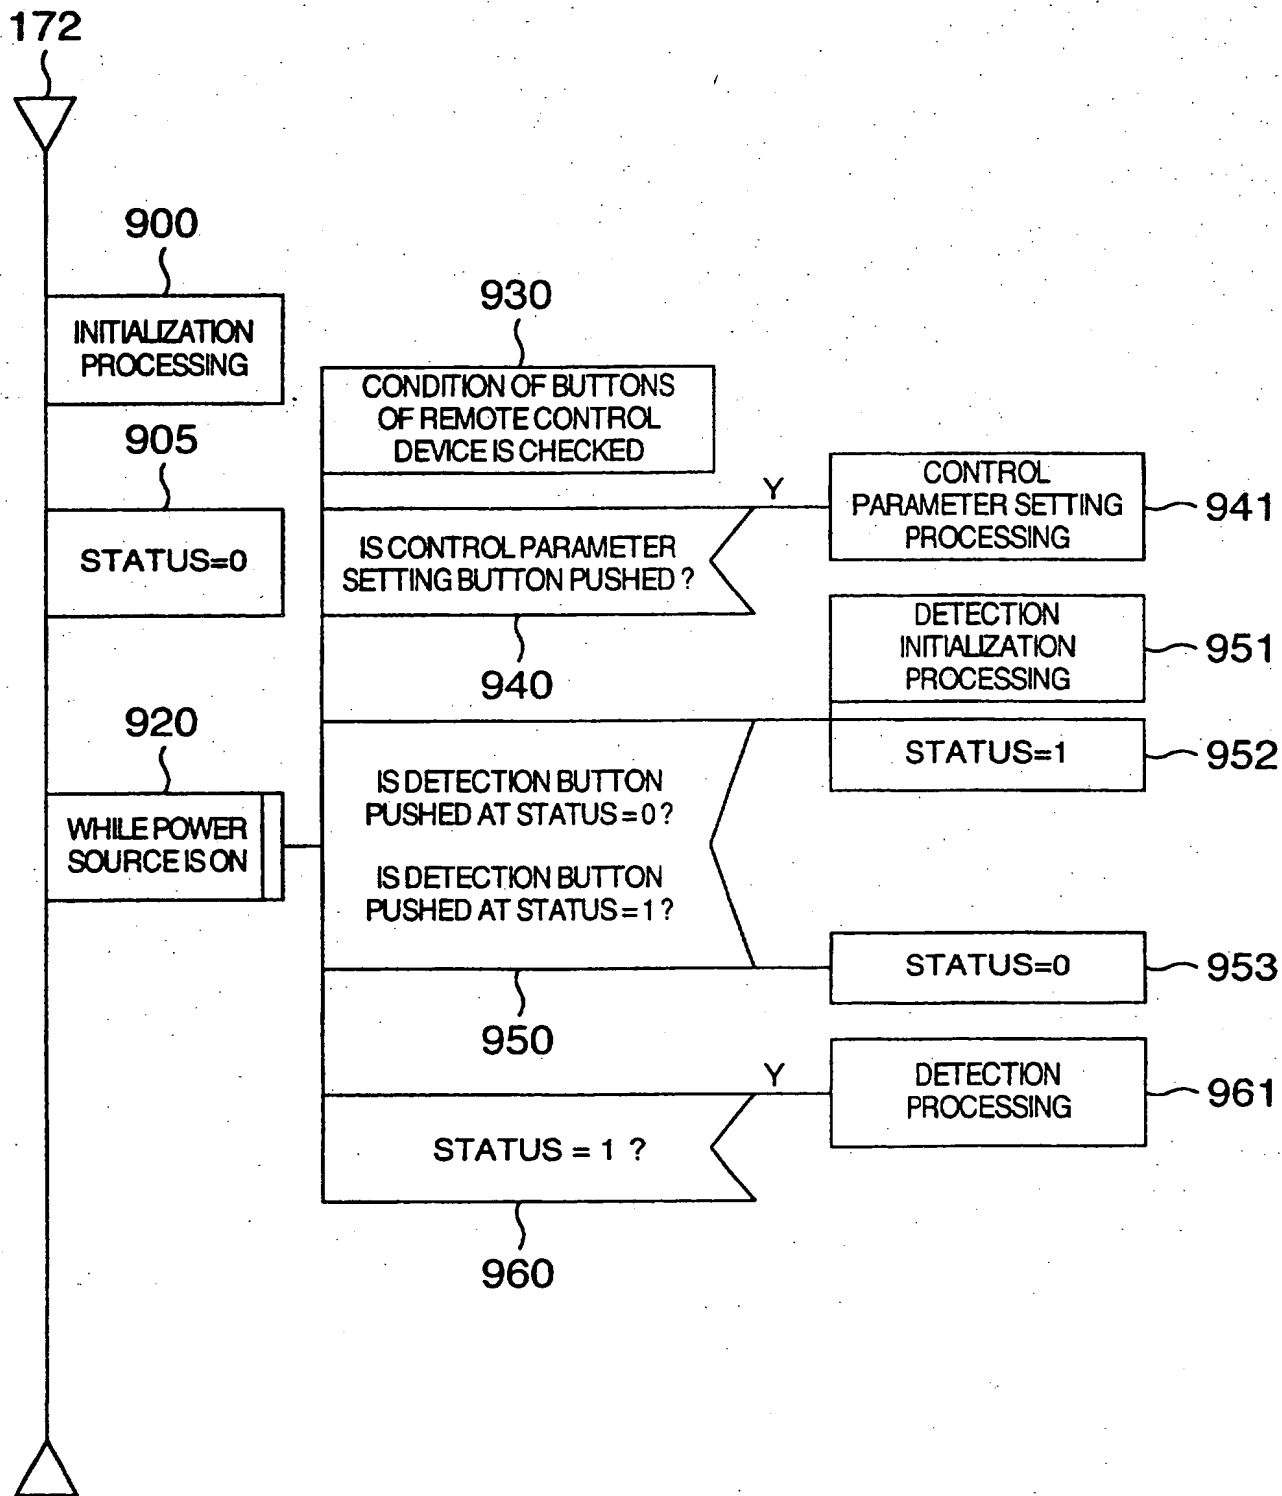


FIG.8

161

RECORDING START YEAR/MONTH/DAY		161-1
RECORDING START TIME		161-2
NUMBER OF RECORDING N		161-3
IMAGE 1	FRAME NUMBER	161-4
	IMAGE ACQUISITION YEAR/MONTH/DAY	161-5
	IMAGE ACQUISITION TIME	161-6
	IMAGE DATA	161-7
⋮	⋮	
IMAGE N	FRAME NUMBER	
	IMAGE ACQUISITION YEAR/MONTH/DAY	
	IMAGE ACQUISITION TIME	
	IMAGE DATA	

FIG. 9



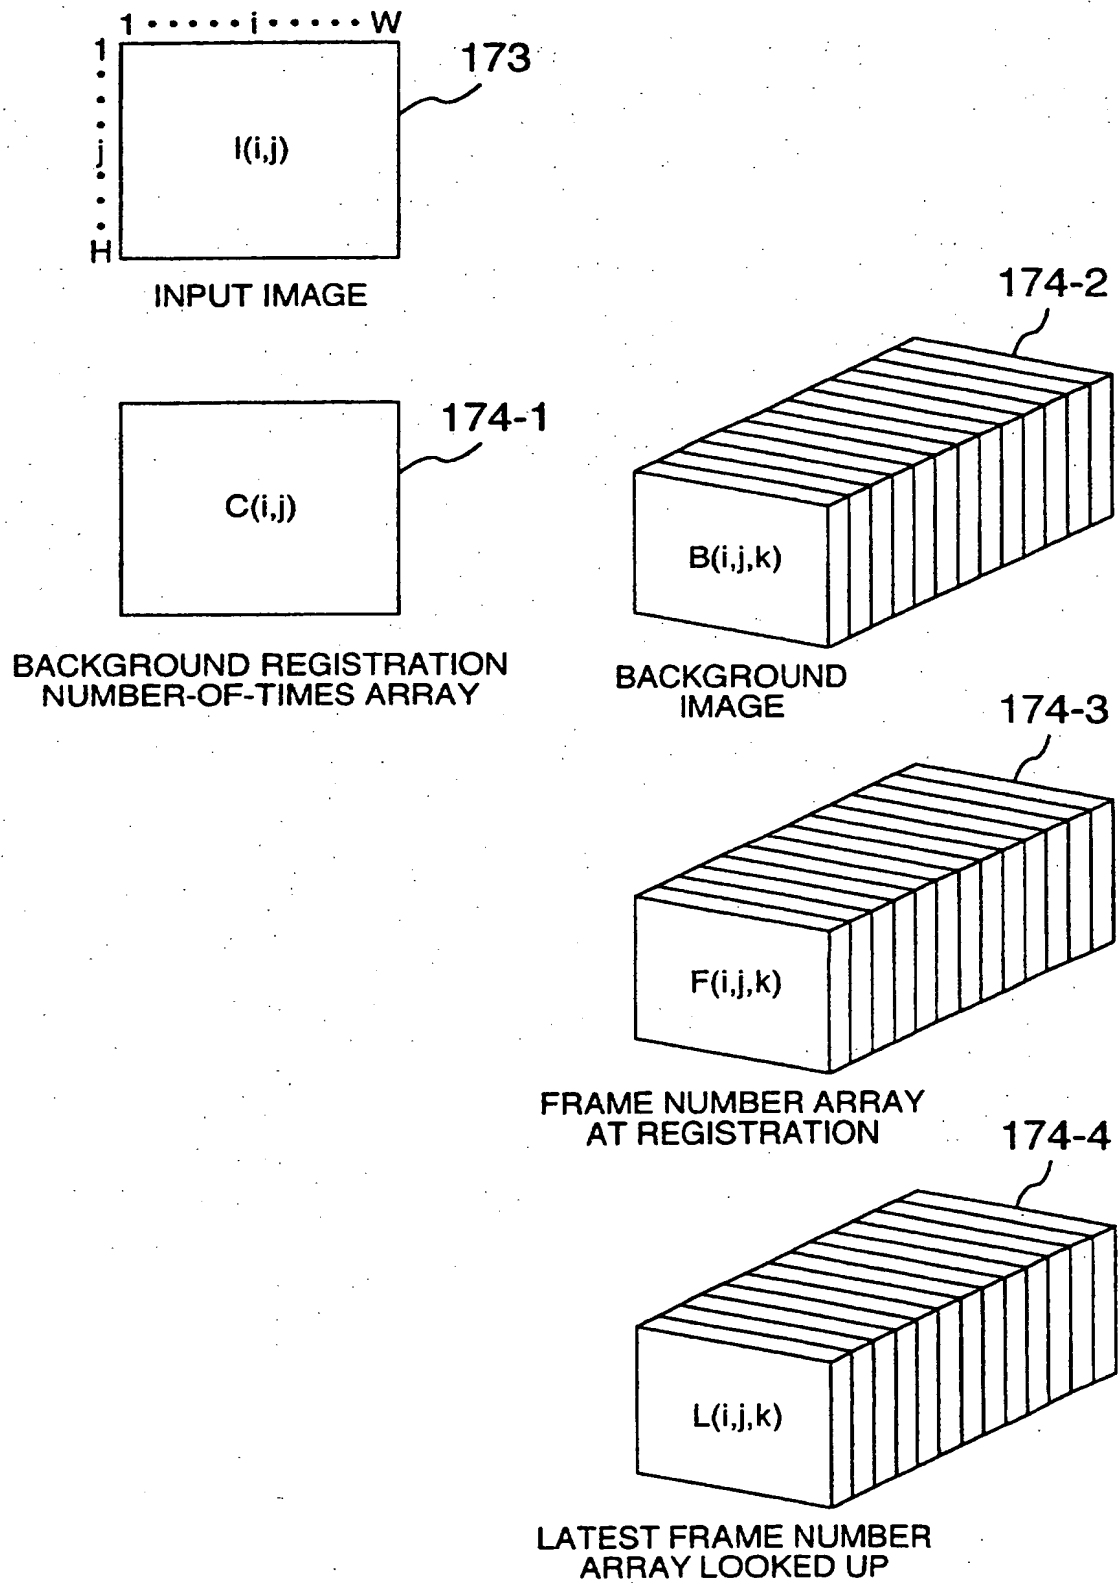


FIG.11

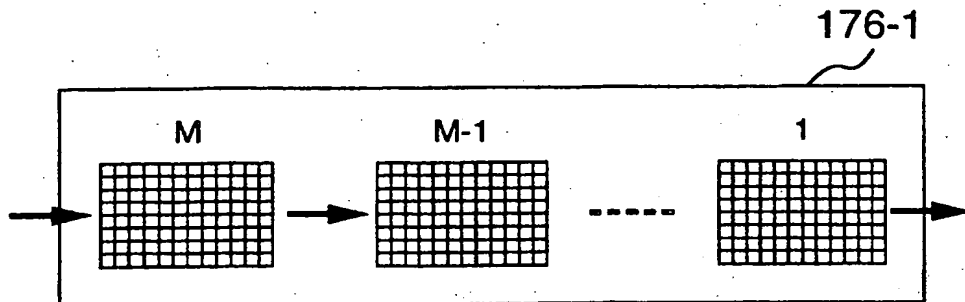


AVESEQ(i,j,k)

SHIFT BUFFER OF BLOCK-WISE MEAN VALUE IMAGE

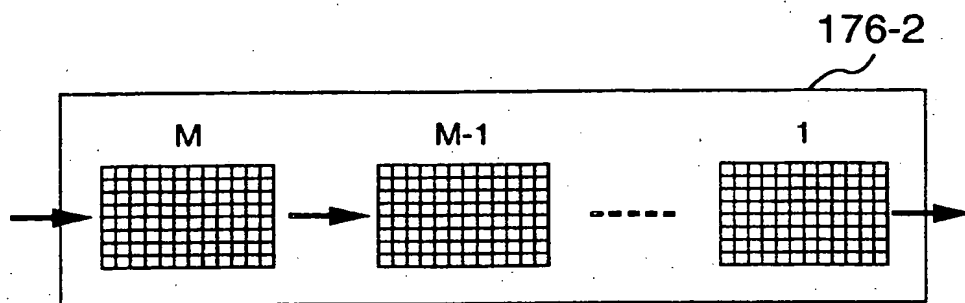

CHANGESEQ(i,j,k)

SHIFT BUFFER OF BLOCK-WISE CHANGE REGION IMAGE

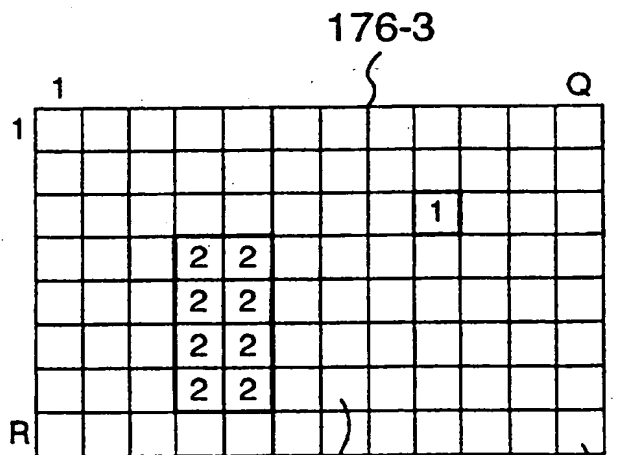

LABEL(i,j)


BLOCK-WISE INTERCONNECTION IMAGE

176-4		xs	xe	ys	ye	area
LABEL	1	9	9	3	3	1
	2	4	5	4	7	8
		⋮	⋮	⋮	⋮	⋮

FEATURE(5,label)


FEATURE QUANTITY TABLE

FIG.12A

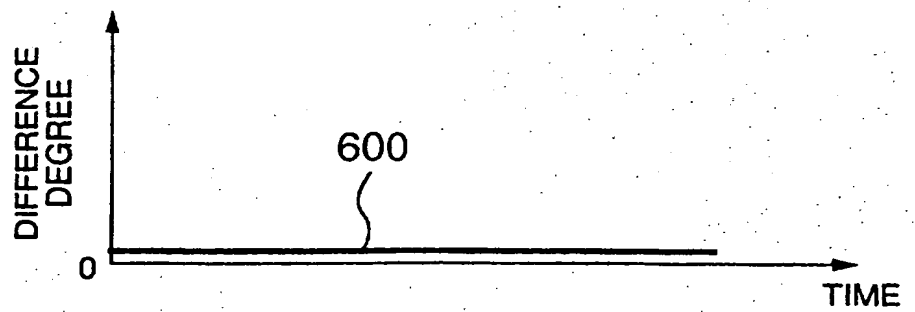


TIME WAVEFORM OF DIFFERENCE
DEGREE OF BLOCK WHEN NO
BACKGROUND CHANGE EXISTS

FIG.12B

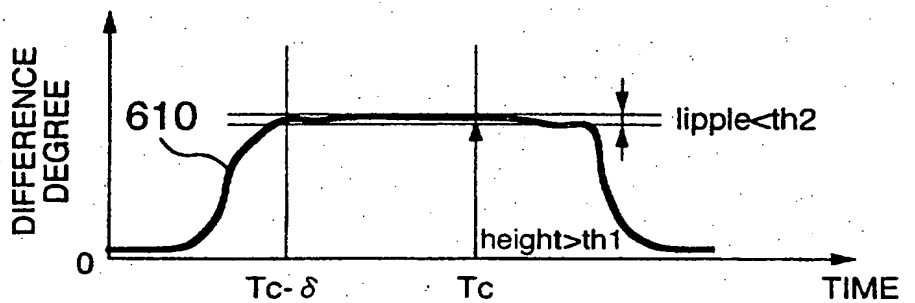


TIME WAVEFORM OF DIFFERENCE
DEGREE OF BLOCK WHEN
BACKGROUND CHANGE EXISTS

FIG.12C

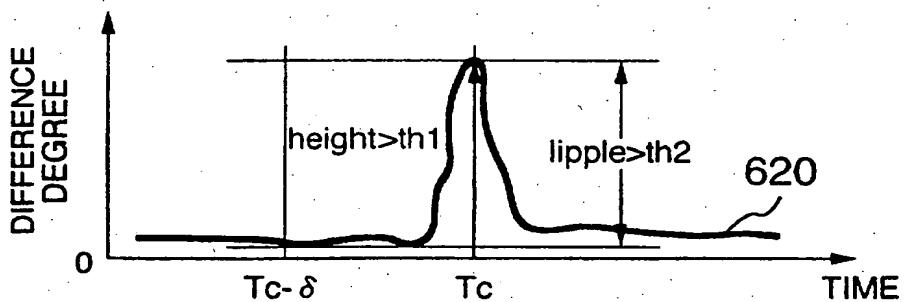

TIME WAVEFORM OF DIFFERENCE
DEGREE OF BLOCK WHEN
INVADING OBJECT EXISTS

FIG.12D

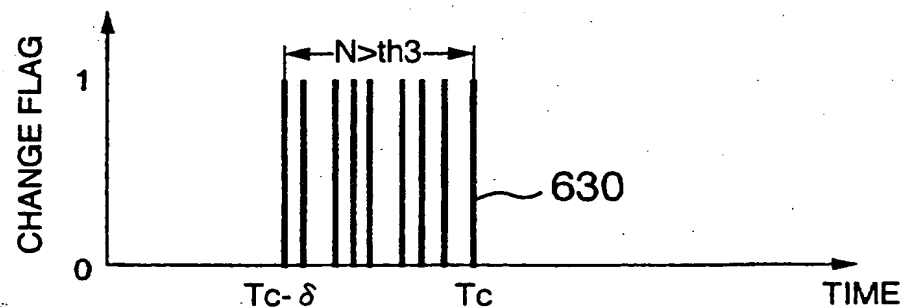

TIME WAVEFORM OF CHANGE
HISTORY OF BLOCK WHEN
BACKGROUND CHANGES PERIODICALLY

FIG.13

DETECTION PROCESSING

961

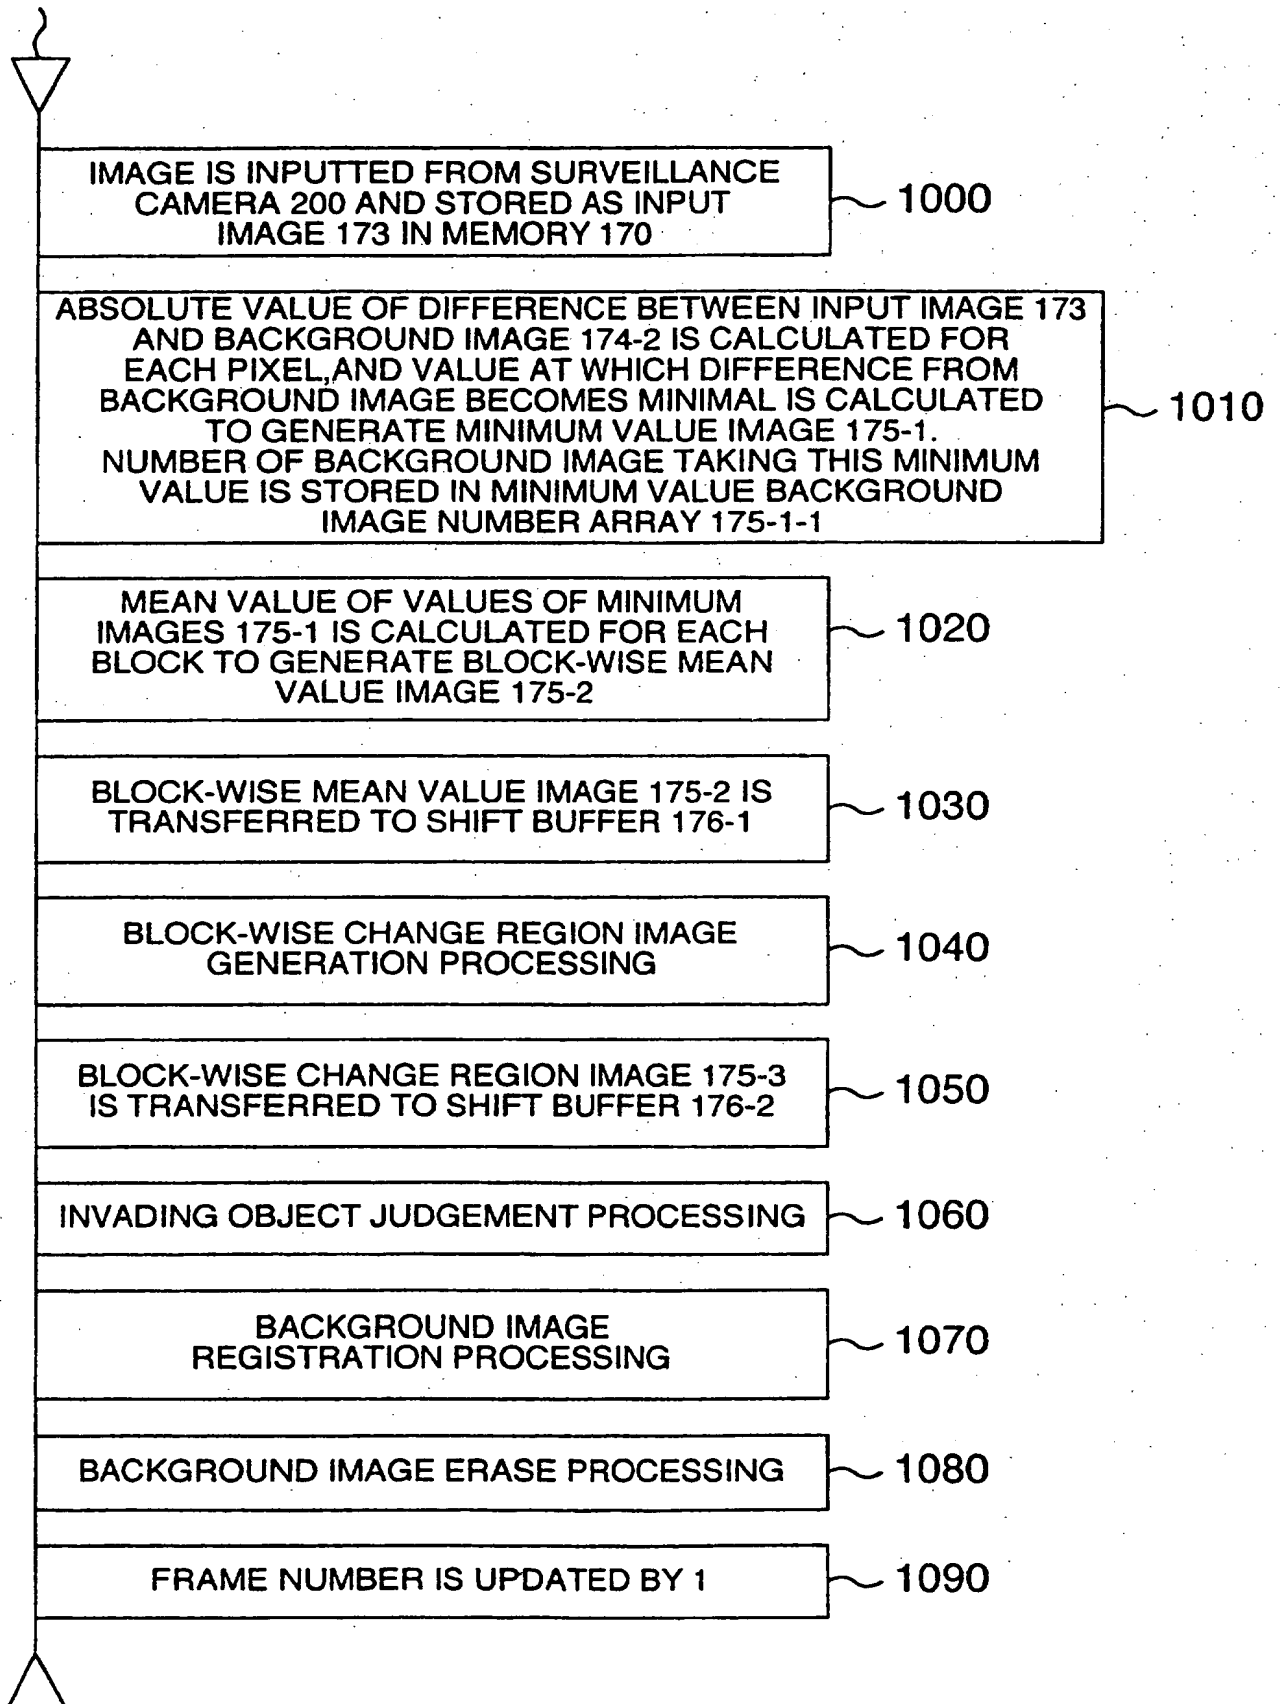


FIG.14

BLOCK-WISE CHANGE REGION
IMAGE GENERATION PROCESSING

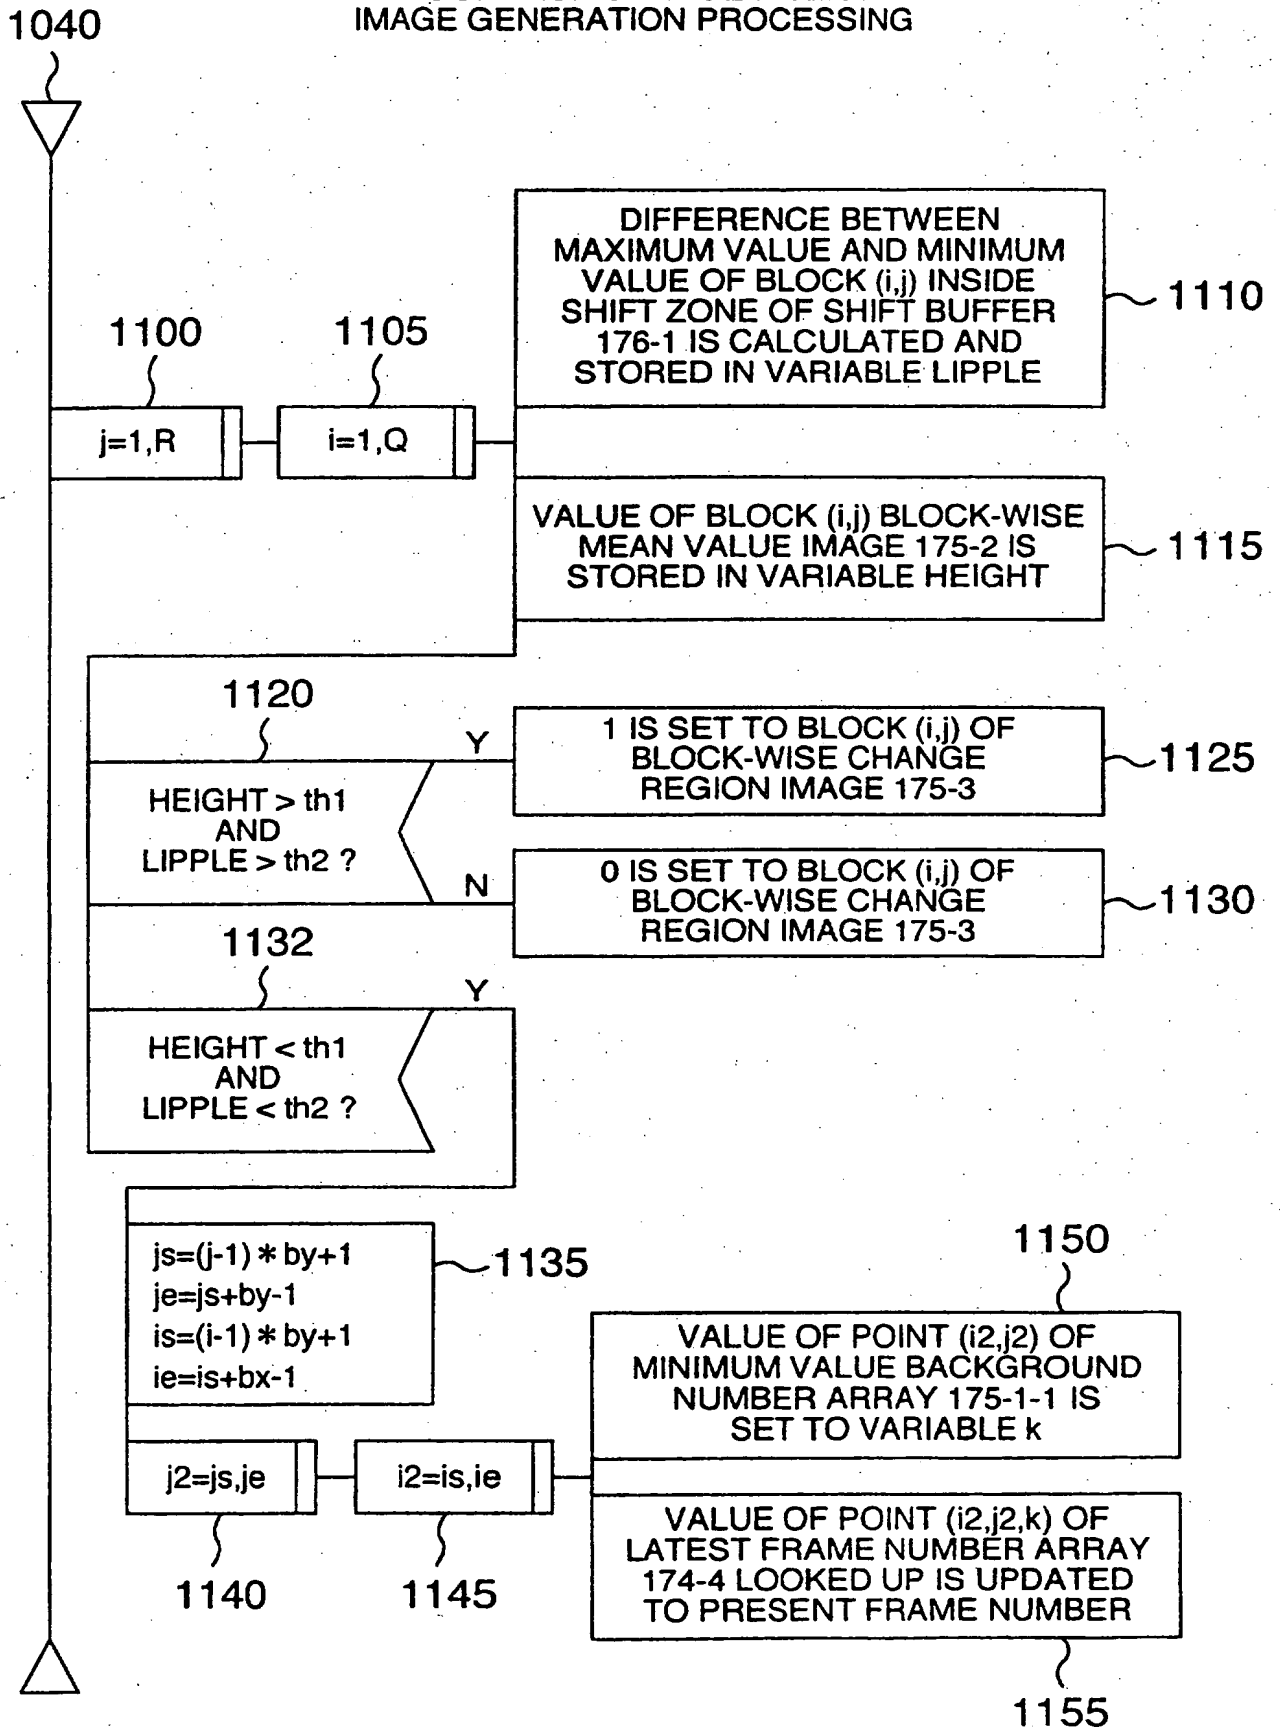


FIG.15

INVADING OBJECT JUDGEMENT PROCESSING

1060

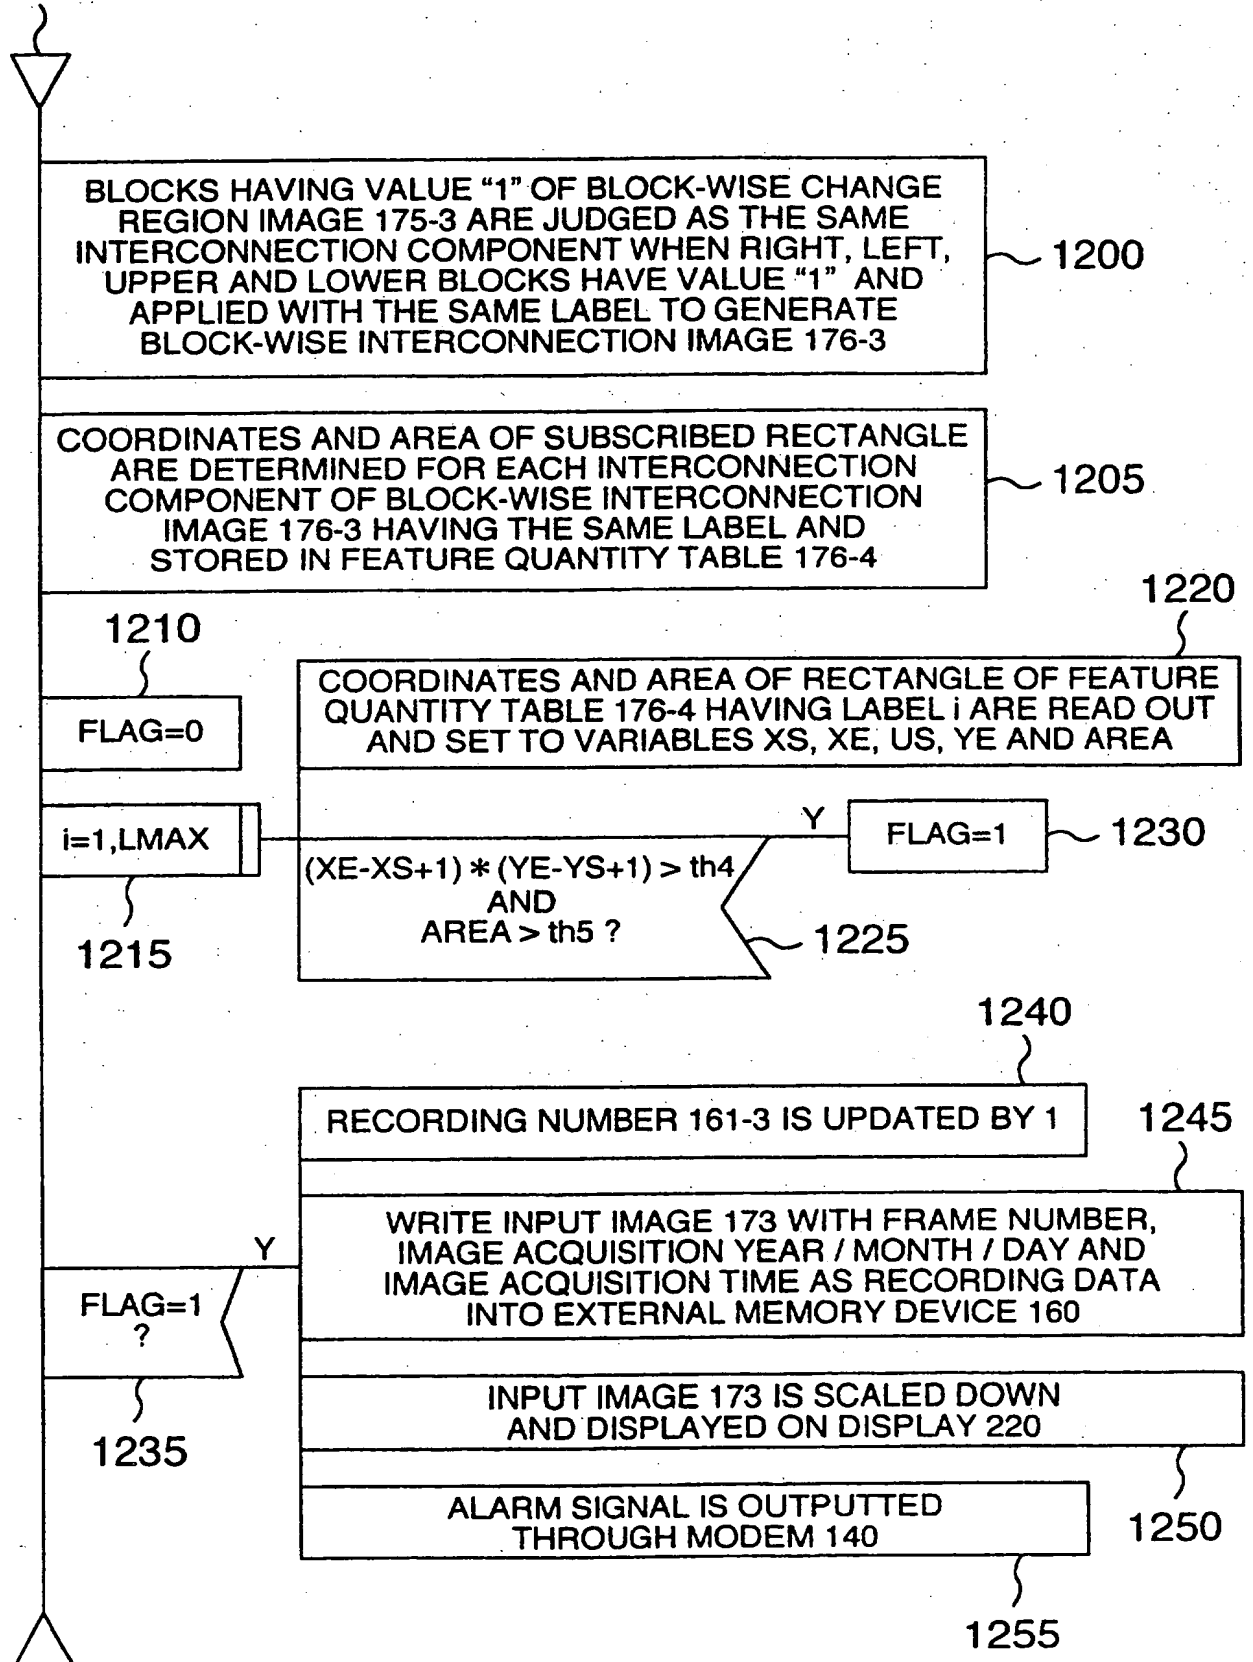


FIG. 16

BACKGROUND IMAGE REGISTRATION PROCESSING


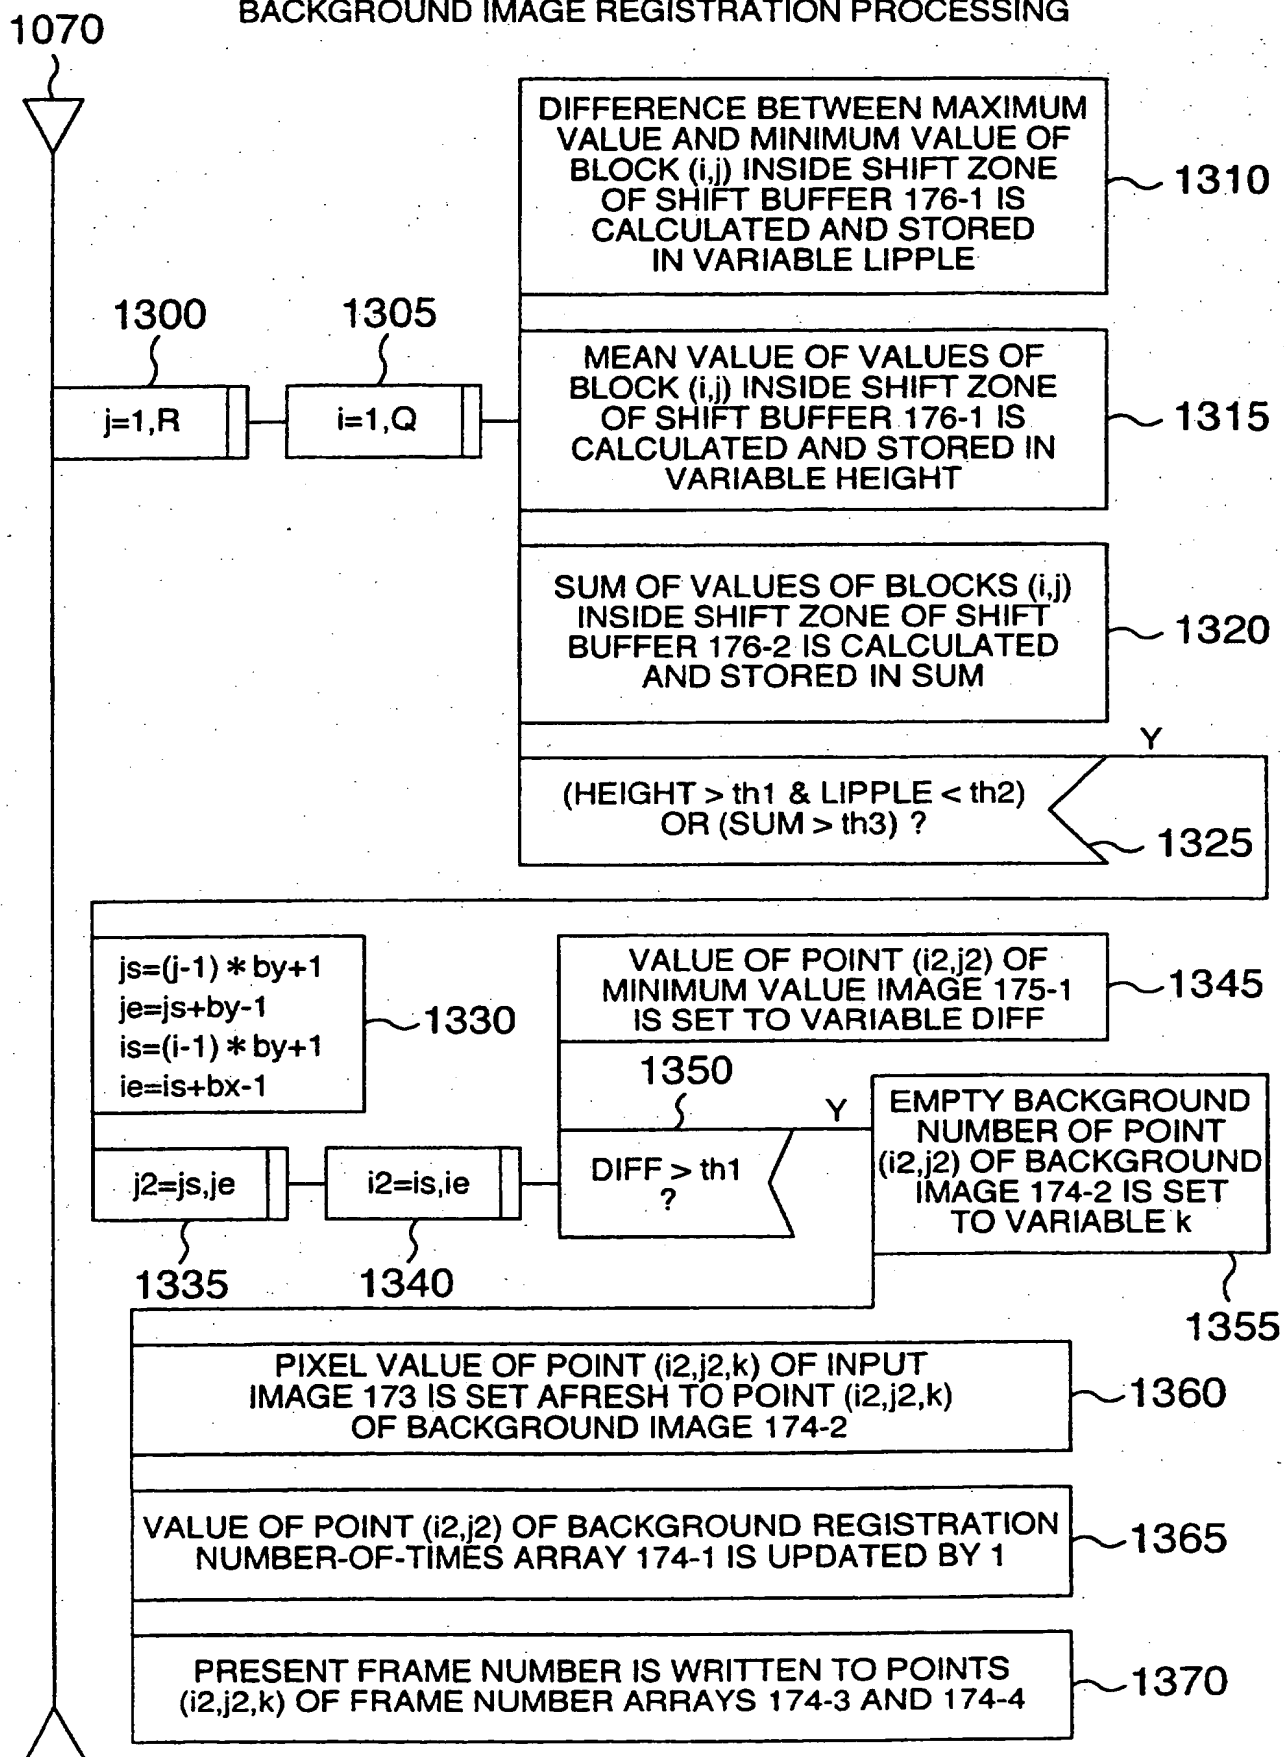


FIG.17

BACKGROUND IMAGE ERASE PROCESSING

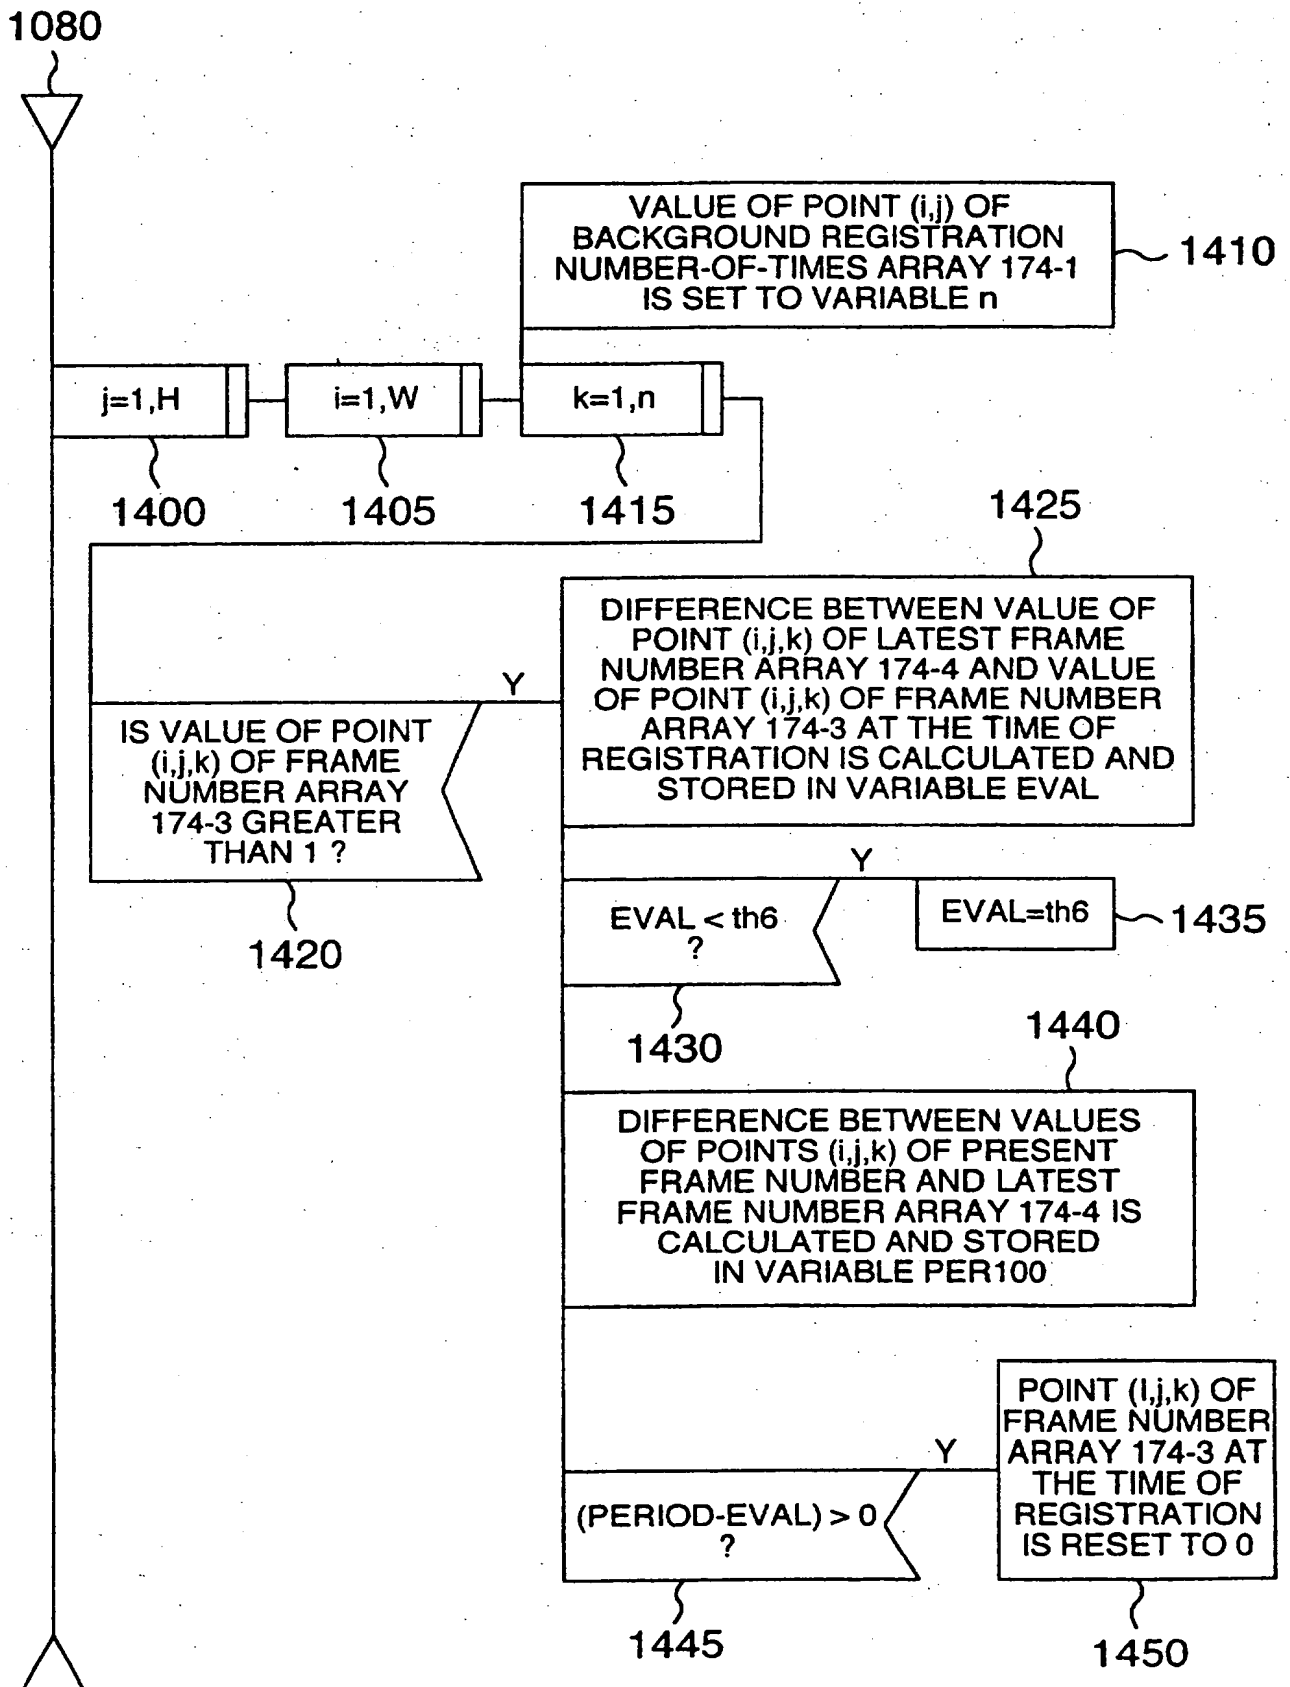

SURVEILLANCE APPARATUS AND RECORDING MEDIUM

RECORDED SURVEILLANCE PROGRAM

This invention relates to a surveillance apparatus for use in the field of a surveillance system and to a software program for accomplishing the surveillance apparatus through a computer. More specifically, the present invention provides an economical surveillance apparatus that is robust to changes of an imaging environment, and a software program for accomplishing the surveillance apparatus.

10 Surveillance by using a camera has been conducted nowadays at various places such as roads, railroad crossings, public facilities, service floors of banks, convenience stores, elevators of apartment buildings, and so forth. The object of surveillance is to prevent beforehand accidents and crimes and to quickly take necessary counter-measures.

A surveillance system of public facilities such as electric power, gas supply, water distribution, etc, includes a plurality of surveillance cameras
20 disposed not only indoors but also outdoors. Therefore, guards can grasp on the real time basis the condition of each site through monitor televisions of a surveillance center.

However, the watching work of continuously
25 watching pictures from a plurality of surveillance

cameras for an extended time is likely to invite "oversight" due to fatigue of the guards. It is therefore customary to employ a method that generates and reports an alarm sound only when any invading
5 object or any abnormal condition is detected, as a surveillance system enabling the guards to watch and confirm the condition only when necessary. Various sensors such as infrared sensors, door sensors, temperature sensors, etc, have been used for the
10 detection, or a method that directly analyzes the images from the surveillance cameras has been used.

The former has high reliability but involves a high cost because a large number of additional sensors must be installed besides the surveillance
15 cameras. The latter does not require additional installation of specific sensors, hence is more economical. However, the latter is not free from the problem of an incorrect alarm because the camera images fluctuate at places where an environmental change is
20 vigorous, such as outdoors, due to sways of trees, rain and snow, reflection of water surfaces, and so forth.

A surveillance apparatus described in JP-A-5-14893, for example, detects an invading object by comparing a background image generated by a smoothing
25 processing in a time direction with an input image. When the background does not change, therefore, this apparatus can correctly detect the invading object. However, the surveillance apparatus still involves in

principle the problem of excessive detection in an environment where the background incessantly changes, such as outdoors.

An image processing apparatus for
5 surveillance according to JP-A-10-105839 uses a mean value of several past frames as a background image, calculates the difference between the background image and an input image to extract an abnormal image applicant, further calculates its difference from a
10 previous frame and distinguishes an abnormal change from others. Because the background image is generated by the mean image, degradation of the detection sensitivity occurs when an invaded object is contained in the background image.

15

In addition to the problems described above, the conventional surveillance apparatuses have the problem that when reliability is improved, the cost of production becomes higher, and when the cost is
20 lowered, an incorrect alert increases. It is therefore an object of the present invention to provide an economical surveillance apparatus that is robust to an environmental change, and a software program for accomplishing the surveillance apparatus.

25

To accomplish this object, the present invention provide a surveillance apparatus including background image memory means for storing a plurality

images inputted in a time series, memory means for recording a difference map, for calculating and storing a minimum value (difference degree) of an absolute value of a difference between a plurality of images and
5 an image afresh inputted, for each pixel, and judgment means for judging the existence/absence of an invading body by using the difference.

These and other objects, features and advantages of the present invention will become more
10 apparent in view of the following detailed description of the preferred embodiments in conjunction with the accompanying drawings.

15 Fig. 1 shows a principle of detection of an invading object;

Fig. 2 shows a surveillance system utilizing a surveillance apparatus according to the present invention;

20 Fig. 3 is a system structural view of a surveillance apparatus according to the present invention;

Fig. 4 shows an example of a remote control device according to the present invention;

25 Fig. 5 shows an example of a control parameter-setting screen according to the present invention;

Fig. 6 shows an example of a basic screen

according to the present invention;

Fig. 7 is a flowchart of an invading object detection control program according to the present invention;

5 Fig. 8 shows an example of a data structure of recording data according to the present invention;

Fig. 9 shows an example of data structures of an input image and a background image according to the present invention;

10 Fig. 10 shows an example of a data structure of a difference image according to the present invention;

Fig. 11 shows an example of control data according to the present invention;

15 Figs. 12A-12D show examples of waveforms of difference degree;

Fig. 13 is a flowchart of a detection processing according to the present invention;

20 Fig. 14 is a flowchart of a block-wise change region image generation according to the present invention;

Fig. 15 is a flowchart of an invading object judgment processing according to the present invention;

25 Fig. 16 is a flowchart of a background image registration processing according to the present invention; and

Fig. 17 is a flowchart of a background image erasing processing according to the present invention.

Fig. 1 shows a principle of an invading object detection by a surveillance apparatus according to the present invention. A background image 174 in which no invading object exists is stored in a memory in advance. This image is compared with an input image 173 to detect an image portion that has changed, and to identify whether or not any invading object enters the image of a surveillance camera. In this instance, several patterns of the background image are stored and all of them are compared with the input image. If there is the possibility of the sway of branches of background trees, for example, several patterns of the sway are stored beforehand. Even when the branches of the trees sway by wind, the input image coincides with any of the background images because the patterns of the sway are stored. Though mere sway of branches has been likely in the past to result in the erroneous judgment of the invading object, the present invention can accomplish robust detection of the invading object against fluctuation or changes of the background.

Fig. 2 shows an example of a surveillance system utilizing a surveillance apparatus according to the present invention. An image signal from a surveillance camera 200 is inputted from a video input terminal 110 of a surveillance apparatus 100 and is converted to a digital image. The digital image is displayed as an analog image on a display 220 from a

video output terminal 110. An alarm signal generated when any invading object is judged as existing is sent from a MODEM terminal 140 to a surveillance center through a telephone line. A mobile phone 210, too, can
5 be utilized in this case. The surveillance apparatus 100 is controlled by an instruction from a remote control device 400 through an IR (infrared ray) receiver 130.

Conventional analog surveillance cameras and
10 displays can be as such utilized as surveillance equipment to be connected to the surveillance apparatus 100 according to the present invention. Furthermore, the alarm signals can be transferred to a remote place through the MODEM.

15 Fig. 3 shows an example of a system construction when the surveillance apparatus according to the present invention is achieved by using a general-purpose computer. In other words, the general-purpose computer executes a software program to
20 accomplish the surveillance apparatus according to the present invention.

Reference numeral 111 in the drawing denotes an A/D converter for converting an analog image signal 210 from a surveillance camera to a digital image. The
25 digital image so converted is inputted to a memory 170 through an interface 112 and at the same time, to a video memory 118.

The video memory 118 stores the image

displayed on a display 220 as digital data. Reference numeral 119 denotes a D/A converter that is generally called "RAMDAC", too. This D/A converter 119 serially reads the data written to the video memory 118 in match
5 with a line scanning speed and depicts an image on the display 220. Therefore, when the data of the video memory 118 is updated, the updated content is immediately reflected on the display content of the display 220.

10 The display 220 is a device for displaying the image. It may be a compact CRT or a plasma display, for example, or a liquid crystal type display device. Continuous moving images can be displayed when such images are repeatedly inputted at a frequency of
15 about 30 times/second.

 An external memory device 160 is a large-capacity memory device such as a hard disk and semi-permanently stores the digital data. The external memory device 160 may be of a type that can be fitted
20 to, and removed from, the apparatus main body for each storage device, such as a PCMCIA system hard disk card, or of a type in which only a recording medium is removable such as DVD-RAM or a flash memory.

 A CPU 150 executes a software program for
25 controlling invading object detection and for achieving the functions of the surveillance apparatus of the present invention. A memory 170 constantly stores the program, and stores also the data necessary for

executing the program.

A modem 139 transfers recorded images and alarm information through a telephone line. An IR receiver 130 is an input device of information from the remote control device. The input information is transmitted to the CPU 150 through an interface 131 and is appropriately processed. Reference numeral 180 denotes a data bus for mutually connecting the devices described above.

10 In the system construction of the surveillance apparatus described above, according to an invading object detection control program 172 stored in the memory 170 in this embodiment the input image as input image data 173 is stored into the memory 170, serially transfers the image to the video memory 118 and displays the image on the display 220. After the invading object detection processing is completed, the image is stored as recorded image data in the external memory device 160, whenever necessary. When the invading object is judged as existing, the alarm signal is outputted through the MODEM 139.

Fig. 4 shows an example of the remote control device that gives instructions to the surveillance apparatus according to the present invention. All the instruction commands from the remote control device 400 are generated through IR signals from an IR emitting portion 420. Reference numeral 410 denotes a button for instructing ON/OFF of a power source. Reference

numeral 430 denotes a button for instructing detection of the invading object. Reference numeral 432 denotes a button for setting control parameters of the invading object detection. Reference numeral 433 denotes a
5 button for setting various data. Reference numeral 434 denotes a paddle switch for selecting items. This button can be moved to right and left and up and down. Reference numeral 435 denotes a paddle switch for setting numeric values of from 0 to 9. When the upper
10 part of this button is pushed, a large value of up to 9 as the maximum is acquired. When its lower part is pushed, a smaller value of down to 0 is acquired.

Next, the mode of operation of the control parameter-setting button 432 and the detection button
15 430 will be explained. When the control parameter-setting button 432 is pushed, a control parameter setting screen for the invading object detection, shown in Fig. 5, is displayed on the display 220. In Fig. 5, reference numeral 500 denotes a cursor. Reference
20 numeral 510 denotes a background image number input region. Reference numeral 511 denotes a background expiration time input region as a period of time necessary for erasing the registered backgrounds. Reference numeral 512 denotes an object judgment size
25 input region.

The paddle switch 434 is operated to position the cursor to a predetermined digit of the background image number input region 510. The paddle switch 435

is operated to input a desired background image number. Next, the cursor is moved to a setting region 530 and the setting button 433 is pushed. In consequence, the background image number that can be stored to maximum
5 is set as a parameter.

Similarly, the paddle switch 434 is operated to position the cursor to a predetermined digit of the background expiration time input region 511. The paddle switch 435 is operated to input a desired
10 background expiration time. Next, the cursor is moved to a setting region 531 and the setting button 433 is pushed. In consequence, the shortest background expiration time is set as a parameter.

The paddle switch 434 is further operated to
15 position the cursor to a predetermined digit of an object judgment size input region 512, and the paddle switch 435 is operated to input a desired object judgment size. Next, the cursor is moved to a setting region 532 and the set button 433 is pushed. In
20 consequence, a minimum object judgment size is set as a parameter.

Finally, the cursor is moved to a region 540 and the set button 433 is pushed, thereby completing the control parameter setting screen. Incidentally, it
25 is also possible to furnish the surveillance apparatus itself with the buttons and the paddle switches in place of using the remote control device. When the general-purpose computer is used to achieve the

surveillance apparatus of the present invention, the functions of the respective buttons and paddle switches may be allocated to the keys of the keyboard in place of the remote control device.

5 When the detection button 430 is pushed, the basic screen shown in Fig. 6 is displayed on the display 220. In Fig. 6, reference numeral 600 denotes a display region of the input image. Reference numeral 610 denotes a region for tabulating and displaying the
10 images generated by detecting and recording the invading object. Recorded images 611 are displayed in a reduced scale while they are aligned. At this time, an object existing region 612 and detection time information 613 are displayed, too. Reference numerals
15 620, 630 and 640 denote parameters that are set at present to detect the invading object. Reference numeral 620 denotes a background image number. Reference numeral 630 denotes a background expiration time and 640 does an object judgment size.

20 This basic screen enables a user to quickly grasp the detection condition of the invading object from the past to the present.

Fig. 7 shows an example of an invading object detection control program 172 for accomplishing control
25 of the surveillance apparatus of the present invention. A step 900 is an initialization processing. The display 220 displays the basic screen shown in Fig. 6. A step 905 resets a variable "STATUS" for controlling a

status of detection to "0".

The following control processing is executed while a power source of the surveillance apparatus is turned on (step 920).

- 5 A step 930 checks the condition of the buttons of the remote control device 400, and a step 940 executes the following judgment processing.

When the control parameter-setting button 432 is pushed, a step 941 executes a control parameter-
10 setting processing. This processing is an interactive processing with the user. After the system displays the control parameter-setting screen on the display, the user operates the remote control device 400 to input numeric values. After this processing is
15 completed, the display content of the display returns to the basic screen shown in Fig. 6.

Next, a judgment processing of a step 950 is executed.

When the variable "STATUS" is "0" and the
20 detection button 430 is pushed, a detection initialization processing 951 is executed. In this detection initialization processing, recording start year/month/day, a recording start time and a number of recording N (a number of recorded frames), that are the
25 header information of recording data when the image containing the invading object is recorded, are written into the external memory device 160. The recording number is "0" at first. A frame number of the input

image is initialized to "1", and the image is inputted from the surveillance camera and is registered as background image data 174. Control data 176 for detection is set to the initial state, too. A value
5 "1" is set to the variable "STATUS" in step 952 to set the mode to a detection mode.

When the variable "STATUS" is "1" and the detection button 430 is pushed, a step 953 is executed. The variable "STATUS" is reset to "0" and the mode is
10 brought to the detection finish state.

In a judgment processing of step 960, the detection process is conducted in a step 961 when STATUS is "1", and when any invading object is detected, the image is written into the external memory
15 device 160 and the alarm signal is outputted. The detail of this detection processing will be explained later with reference to Fig. 13. Therefore, various data structures used for the detection processing will be first explained.

20 Fig. 8 shows an example of the data structure of the recorded data 161 in the present invention. The recorded data includes a header portion and an image portion. A recording start year/month/day 161-1, a recording start time 161-2 and the number of recording
25 (a number of recorded frames) 161-3 are recorded to the header portion. A frame number 161-4, an image acquisition year/month/day 161-5, an image acquisition time 161-6 and image data 161-7 are recorded to the

image portion.

Fig. 9 shows the data structures of the input image and the background image. Reference numeral 173 denotes the input image. The input image has W pixels in the transverse direction and H pixels in the longitudinal direction. In the images of the NTSC standard, W is 640 and H is 480. Reference numeral 174 denotes the background image. In the background image 174-2, maximum K pixel values are registered for each pixel at an (i, j) position. Background registration number-of-times array 174-1 is an array for storing the number of times of registration of the background pixel value for each pixel.

The data structure further includes a frame number array 174-3 at the time of registration, for storing reference history information as the background image for each pixel and the latest referred frame number array 174-4 that is looked up. The frame number array at the time of registration is an array for storing the frame number of the pixel values registered. In other words, it manages the time at which the background images are registered.

The latest referred frame number array is an array for storing the frame number of the pixel value that is looked up at the latest. In other words, it manages the time at which it is used lastly as the background image.

In the present invention, reference history

information of the background image is stored for each pixel. Therefore, registration and erasing of the background image can be finely conducted in a pixel unit. In other words, under an imaging condition where only a part on the screen periodically changes, only the changing part can be additionally registered or erased as the background portion.

Fig. 10 shows a data structure of a difference image comprising a minimum value (difference degree) of an absolute value of difference between the input image and a plurality of background images for each pixel. Reference numeral 175-1 denotes an image comprising a minimum value determined by calculating a value, at which the absolute value of the difference between a plurality of background images and the input image becomes minimal, for each pixel. The difference between the background image and the input image can be known in a pixel unit from this image. Reference numeral 175-1-1 denotes a minimum background number array for storing a background pixel number when the absolute value of difference is minimal. It becomes possible to know from the content of the minimum value background number array which background pixel is most analogous to the input pixel. When this minimum value background number array is used, reference history information of the background pixels can be simply updated.

Reference numeral 175-2 denotes a block-wise

mean value image that stores a mean value of values inside each block when the minimum value image 175-1 is divided into Q transverse blocks and R longitudinal blocks. In this embodiment, Q is 16 and R is 12, but
5 these values are not limitative. When the mean value is determined block-wise, the difference between the background image and the input image can be known in a block unit. Since the invading object has a certain size, detection performance becomes more robust by
10 judging a rough difference in a block unit.

Reference numeral 175-3 denotes a block-wise change region image obtained by a processing which sets the block-wise mean value image 175-2 to "1" when it is greater than a predetermined threshold value and to "0"
15 at other times. The block detected in this way has the value "1".

Fig. 11 denotes a structure of control data for detection. Reference numeral 176-1 denotes a FIFO (Fast-In Fast-Out) type shift buffer for storing the
20 block-wise mean value images for past M frames. This structure is looked up when the change of the difference for each block is analyzed in a time series.

Reference numeral 176-2 denotes a FIFO (Fast-In Fast-Out) type shift buffer for storing the block-wise
25 change region images for each block for past M frames.

Reference numeral 176-3 denotes a block-wise interconnection image for allocating the same label for distinguishing individual interconnection components,

for each connection component having the value "1" of the block-wise change region image 175-3. Reference numeral 176-4 denotes a feature quantity table that stores upper left coordinates (XS, YS) and lower right coordinates (XE, YE) of a circumscribing rectangle and its area for each label of the block-wise interconnection image 176-3. Final judgment as to whether the object is the invading object or other objects depend on whether or not this feature quantity coincides with a predetermined standard.

Figs. 12A-12D show examples of time waveforms of the difference degree of each block in the present invention. Fig. 12A shows an example where no structural change of the background exists. In this case, the difference degree having small values continue. Fig. 12B shows an example where a structural change of the background exists. In this example, the difference degree have high values, and a flat condition continues. The case where the structural change of the background exists includes the case where a car comes to and parks at a place under surveillance, for example. The car is not a part of the background at the beginning but becomes a part after it parks.

When the background entirely changes from the previous state, the present invention registers afresh the input image as the background image. Fig. 12C shows an example where the invading object exists, and difference degree reaches a high value only for a short

time. This is the case where a person passes by the place under surveillance, for example. Detecting blocks exhibiting such a change, the present invention judges the number of times of the changes in this block
5 and spatial expansion of the changing block, and classifies the change into the periodic change of the background and the true invading object.

Fig. 12D shows an example of a waveform of a block change when the background changes periodically
10 due to influences of wind, and so forth. In such a case, a large number of changes occur within a short time. Detecting such a block, the present invention judges this block as the changing background and registers the input image of this block portion as a
15 new background for each pixel.

Even when the surveillance camera images swaying trees or reflection of the water surface, the function of the present invention for registering a plurality of backgrounds for each pixel can eliminate
20 incorrect judgment of such trees or reflection as the invading object and continuous generation of the alarm. Incidentally, the range δ of the past reference time is 2 seconds, that is, 60 frames ($M = 60$), but this value is not restrictive.

25 Fig. 13 is a flowchart showing the detail of the detection processing 961 in the present invention.

First, in a step 1000, the image from the surveillance camera 200 is inputted and the image as

the input image 173 is stored in the memory 170.

In a next step 1010, an absolute value of the difference between the input image 173 and the background image 174-2 is calculated for each pixel, then calculates a minimum value among all the background images is calculated and a minimum value image 175-1 is generated. In this step, the number of the background image assuming the minimum value is stored to a minimum value background number array 175-1-1.

In a step 1020, a mean value of the value of the minimum value image 175-1 is calculated for each block and a block-wise mean value image 175-2 is generated. The block-wise mean value image 175-2 thus generated is transferred further to a shift buffer 176-1 in a step 1030.

In a next step 1040, a block-wise change region image 175-2 is generated. The detail of this step will be explained later with reference to Fig. 14. In a step 1050, the block-wise change region image 175-2 is transferred to a shift buffer 176-2. On the basis of the data generated by the process steps described above, an invading object judgment processing is executed in a step 1060, a background image registration processing is executed in a step 1070 and a background image erase processing is executed in a step 1080. Finally, in a step 1090, the frame number is incremented by one.

Even when any change occurs in the background during imaging by the surveillance camera, the process steps of the present invention described above automatically update the background and can stably
5 detect only the invading object.

The steps 1040, 1060, 1070 and 1080 will be explained in further detail with reference to Figs. 14, 15, 16 and 17.

Fig. 14 is a flowchart showing the detail of
10 a block-wise change region generation processing. This embodiment divides the whole screen into $Q \times R = 16 \times 12$ blocks. When a large body is to be detected, however, this division number may be smaller. The block-wise change region generation processing can be
15 achieved when the following steps are executed for all the blocks.

First, a variable "LIPPLE" and a variable "HEIGHT", each for judging whether or not each block changes, are calculated. In a step 1110, the
20 difference between a maximum value and a minimum value of a block (i, j) inside a shift zone of the shift buffer 176-1 storing the block-wise mean value image is calculated, and the difference is stored in the variable "LIPPLE". Next, the value of the block (i, j)
25 of the block-wise mean value image 175-2 of the present frame is stored in the variable "HEIGHT".

In a step 1120, it is judged that whether or not the variable "HEIGHT" (block mean value of present

frame) is greater than a predetermined threshold value th1 and also the variable "LIPPLE" (the difference between the maximum value and the minimum value of the block mean value of the present frame) is greater than a predetermined threshold value th2. When both variables are greater than the respective threshold values, the state is judged as the state shown in Fig. 12C. In a step 1125, "1" is set to the block (i, j) of the block-wise change region image 175-3. When both are smaller, on the other hand, in a step 1130 "0" is set to the block (i, j) of the block-wise change region image 175-3. In this embodiment, both th1 and th2 are 5 but other values may be used. Incidentally, the range of the value the pixels take is from 0 to 255.

In a step 1132, it is judged whether or not the variable "HEIGHT" is smaller than the predetermined threshold value th1 and the variable "LIPPLE" is smaller than the predetermined threshold value th2. If both variables are smaller than the respective threshold values, the state is judged as the state shown in Fig. 12A, and an update processing of the reference history information of the background image from the steps 1135 to 1155 is executed. In the step 1135, the range of the address of the block (i, j) on the practical image is calculated. It also updates the reference history information of the background pixel that is looked up.

First, in a step 1150, the value of the point

(i2, j2) of the minimum value background number array 175-1-1 is set to the variable k. Next, the point (i2, j2, k) of the array 174-4 recording the latest frame number that is looked up in the step 1150 is updated to the present frame number. In this way, this embodiment updates the reference history information of the background pixels inside all the corresponding blocks when the image inputted at present coincides with the background image as a block.

10 Fig. 15 is a flowchart showing the detail of a judgment processing for judging the existence/absence of the invading object.

 First, the feature quantities necessary for detecting the region of the invading object, that is, the coordinates of a circumscribed rectangle encompassing the invading object and the area of the rectangle, are determined. Therefore, as to the blocks having a value "1" of the block-wise change region image 175-3, in a step 1200, it is judged that these blocks as the same interconnection component if their left, right, upper or lower block is "1", the same label is provided to them and the block-wise interconnection image 176-3 is generated. In a step 1205, a circumscribed rectangle and its area for each interconnection component having the same label of the block-wise interconnected image 176-3 are determined and stored in the feature quantity table 176-4.

 Next, in steps 1210 to 1230, the

existence/absence of the invading object is examined.
First, in the step 1210, a variable "FLAG" is reset to
"0". When this variable "FLAG" changes to "1" in the
subsequent steps, the invading object is judged as
5 existing. The steps 1220 to 1230 are repeated for all
the labels. In the step 1220, the coordinates of the
circumscribed rectangle of the label i of the feature
quantity table and its area are read out and set to
variables XS, XE, YS, YE and AREA. In the step 1225,
10 it is judged whether conditions $(XE - XS + 1) \times (YE -$
 $YS + 1) > th4$ and $AREA > th5$ are satisfied. When these
conditions are satisfied, in the step 1230, the
variable FLAG is set to "1".

This embodiment judges both the size of the
15 circumscribed rectangle and its area for the following
reason. Since the properties of the shape of the
invading object such as people are different from those
of the invading object such as the swaying branches of
trees, both of the features are employed for distin-
20 guishing their differences. Here, the concrete values
of the threshold values th4 and th5 vary depending on
the invading object to be detected. Therefore, the
user sets in advance suitable values. In this
embodiment, both th4 and th5 are 2.

25 Finally, in the step 1235, it is judged
whether or not the variable "FLAG" is "1". When it is
"1", the process at the time of existence of the
invading object in the steps 1240 to 1255 is executed.

In the step 1240, the recording number (the number of recorded frames) 161-3 is incremented by one. In the step 1245, the present input image 173 with the frame number, the image acquisition year/month/day and the
5 image acquisition time as the recording data are written into the external memory device 160. Next, in the step 1250, the size of the input image 173 and displays the image on the display 220 is reduced. In this instance, the circumscribed rectangle encompassing
10 the invading object may be overwritten and displayed in the image. The detection time may further be displayed. When display is made in this way, the user can instantaneously grasp the detection state of the invading object from the past to the present moment.
15 In the step 1255, the alarm signal is output through the modem 140.

Fig. 16 is a flowchart showing in detail the background image registration processing. The background image registration processing can be
20 achieved by executing the following process for all the blocks. First, the variables "LIPPLE", "HEIGHT", and "SUM" are calculated to judge whether or not each block changes. In a step 1310, the difference between the maximum value and the minimum value of the block (i, j)
25 inside the shift zone of the shift buffer 176-1 storing the block-wise mean value image is calculated and stored in the variable "LIPPLE". Next, in a step 1315, the mean value of the block (i, j) inside the shift

zone of the shift buffer 176-1 is calculated and stored in the variable "HEIGHT".

In a step 1320, the sum of the values of the blocks (i, j) inside the shift zone of the shift buffer 176-2 storing the block-wise change region image is calculated and stored in the variable "SUM".

In a next step 1325, a registration condition of the background image is judged. The registration condition includes two conditions. The first one is "HEIGHT" > th1 and "LIPPLE" < th2, and this is the case where the condition of Fig. 12B is detected. The second one is "SUM" > th3, and this is the case where the condition of Fig. 12D is detected. The former represents the structural change of the background, and corresponds to the case where a car parks afresh inside the background, for example. The latter represents the periodic change of the background and corresponds to the case where branches of trees incessantly sway due to a strong wind.

When such conditions are detected, steps 1230 to 1370 are executed to afresh register the background image. Here, th3 is 30 in this embodiment. This is the value when the past reference time range δ is 2 seconds, that is, $M = 60$, and represents detection of the condition where the background has changed more than 50% in the past.

In a step 1330, the range of the addresses on the practical images of the block (i, j) is calculated.

Only when the difference degree of the pixels inside the block is excessively large, the pixel value of the input image is partially registered as a background image for each pixel.

5 First, in a step 1345, the value of a point (i2, j2) of the minimum value image 175-1 of the absolute value of the difference is set to a variable "DIFF". Next, in a step 1350, it is judged whether or not the variable "DIFF" is greater than th1. When it
10 is greater, the pixels of the input image are different from all the background pixels that are registered at present. Therefore, steps 1355 to 1370 are executed to register the background pixels.

 In the step 1355, the number of registration
15 portion of an empty background of the point (i2, j2) of the background image 174-2 is set to a variable k. Next, in the step 1360, the pixel value of the point (i2, j2) of the input image 173 is registered afresh to the point (i2, j2, k) of the background image 174-2.
20 In the step 1365, the value of the point (i2, j2) of the array 174-1 recording the number of times of background registration is incremented by one. Finally, in the step 1370, the present frame number is written in the frame number array 174-3 at the time of
25 registration and to the point (i2, j2, k) of the latest frame number array 174-4 that is looked up.

Fig. 17 is a flowchart that shows in detail a background image erase processing. Contrary to the

processing shown in Fig. 16 for dynamically registering the background image, this processing dynamically erases the background images that are not used. This processing reduces the memory capacity necessary for the apparatus and shortens the computation time necessary for detecting the invading object. Further, this processing can prevent deterioration of detection sensitivity that occurs when a great number of unnecessary background images are stored.

10 First, steps 1410 to 1450 are executed for all the background images. In the step 1410, the value of the point (i,j) of the background registration number-of-times array 174-1 is set to the variable n. The following steps are executed for the variable k
15 from 1 to n times.

First, in the step 1420, it is judged whether or not the value of the point (i, j, k) of the frame number array at the time of registration is greater than 1. When it is greater than 1, the background
20 image is judged as being not yet erased, and the processing of the steps 1425 to 1450 is executed. In the step 1425, the difference between the value of the point (i, j, k) of the latest frame number array 174-4 that is looked up and the value of the point (i, j, k)
25 of the frame number array 174-3 at the time of registration is calculated and stored in the variable "EVAL". The value of this variable "EVAL" represents the period in which the corresponding background pixel

is looked up. In the step 1430, it is judged whether or not the variable "EVAL" is smaller than a predetermined threshold value th6. When the variable "EVAL" is smaller, the threshold value th6 is written to the
5 variable "EVAL". Here, the threshold value th6 can take an arbitrary value. When a large value is set, the background can be stored for a long time. In this embodiment, th6 is set to a value of the number of frames corresponding to about 10 seconds, that is, 300.
10 The reason why the threshold value th6 is written to the variable "EVAL" when the variable "EVAL" is smaller than the predetermined threshold value th6 is to prevent the background having a short reference time from being immediately erased.

15 Next, in the step 1440, the difference between the present frame number and the value of the point (i, j, k) of the latest frame number array 174-4 that is looked up is calculated and stored in a variable "PERIOD". This variable "PERIOD" represents
20 the period that has not been looked up so far.

 Importance of the present point is judged from a function using the two variables, i.e. the period "EVAL" that is looked up and the period "PERIOD" that is not looked up, and whether or not the
25 background pixels are to be erased is decided. In this embodiment, the step 1445 executes this judgment by judging whether or not (PERIOD - EVAL) is positive, but whether or not (PERIOD - EVAL/K) is positive may be

used as another judgment reference. Here, K is a constant. When judgment represents that background pixels should be erased, in the step 1450, the value of the point (i, j, k) of the frame number array 174-3 at
5 the time of registration is reset to "0". In consequence, the corresponding background pixel is erased.

Since the present invention can detect the invading object from the image of the surveillance
10 camera, the present invention does not require any additional sensors besides the surveillance camera and can therefore provide an economical surveillance apparatus. Because a plurality of background images can be automatically registered from the camera images
15 from the place such as outdoors where the environmental change is vigorous, the present invention can provide a robust surveillance apparatus that does not generate an incorrect report even when the environmental change occurs due to the sway of trees, rain and water,
20 reflection from the water surface, and so forth. Furthermore, because the background images that are not used are automatically erased, the present invention can prevent the drop of the detection speed and the detection sensitivity.

25 While the present invention has been described above in conjunction with the preferred embodiments, one of ordinary skill in the art could be enabled by this disclosure to make various

modifications to the embodiments and still be within the scope and spirit of the invention as defined in the appended claims.

CLAIMS

1. A surveillance apparatus comprising:
input means for inputting images in a time series;
background image memory means for registering a plurality of background images from said images;
difference image memory means for calculating a minimum value of difference degree of an absolute value of a difference between said background image and an image afresh inputted for each pixel and storing said difference; and
judgment means for judging an existence/absence of an invading object on the basis of said difference degree.

2. A surveillance apparatus according to claim 1, wherein said background image comprises a single or a plurality of pixel values registered for each pixel.

3. A surveillance apparatus according to claim 2, wherein:

said background image is registered or erased for each pixel;

erasing is determined on the basis of a period from a registration time of said pixel to a time at which said pixel is last looked up, and a period from a time at which said pixel is last looked up to a present time;

when registration is made, a new pixel value is written to an empty region if said empty region

exists in said background image memory means, and if said empty region does not exist, importance of each pixel value of a corresponding pixel is calculated and is overwritten to an image value having the lowest degree of importance.

4. A surveillance apparatus according to claim 1, which further includes:

memory means for recording said image inputted afresh when said judgment means judges that an invading object exists.

5. A surveillance apparatus according to claim 1, wherein:

said difference image memory means includes minimum value image memory means for storing a minimum value image comprising an absolute value of a difference for each pixel and block-wise mean image memory means for dividing said minimum value image into blocks, and calculating and storing a mean value of an absolute value of a difference for each block; and

said judgment means judges an existence/absence of an invading object on the basis of a time series change of said mean value.

6. A recording medium having recorded thereon a surveillance program executed by a computer including input/output means, a CPU and a memory, said program comprising the steps of:

inputting in a time series images from said input/output means;

registering a plurality of background images from said images into said memory;

calculating a minimum value of difference degree of an absolute value of a difference between said background image and an image inputted afresh for each pixel, and storing said minimum value in said memory; and

judging an existence/absence of an invading object on the basis of said difference degree.

7. A recording medium according to claim 6, wherein said background image comprises a single or a plurality of pixel values registered for each pixel.

8. A recording medium according to claim 7, wherein:

said surveillance program includes a step of erasing said background image;

in said erasing step, a pixel to be erased is decided on the basis of a period from a registration time of each of said pixel values to a time at which it is last looked up, and a period from the time at which it is last looked up to a present time; and

in said registration step, a new pixel value is written to an empty region if said empty region exists in said background image memory means, and if said empty region does not exist, a degree of importance for each pixel value of a corresponding pixel is calculated and is overwritten to a pixel value having the lowest degree of importance.

9. A recording medium according to claim 6, wherein when said surveillance program further includes a step of recording said image inputted afresh when said judgment means judges that an invading object exists.

10. A recording medium according to claim 6, wherein said surveillance program further includes the steps of:

storing a minimum value image comprising an absolute value of a difference for each pixel; and

dividing said minimum value image into blocks, and calculating and storing a mean value of an absolute value of a difference for each of said blocks; and wherein:

said judgment step judges an existence/absence of an invading object on the basis of a time series change of said mean value.



Application No: GB 0031099.5
Claims searched: 1 & 6

Examiner: J. C. Cowen
Date of search: 27 June 2001

Patents Act 1977 Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK CI (Ed.S): G1A AAJP
G4N NFFV
H4F FAAE,FAAX,FDG,FGM

Int CI (Ed.7): G08B13/194, 13/196
H04N 7/18

Other: WPI,EPODOC,PAJ,TXTE

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	GB 2183878 A Matsushita - see abstract	1
X	GB 2150724 A Christopher Hall et al - see column 1, lines 24 - 46	1
X	EP 0183106 A2 Matsushita - see abstract & page 2, paragraph 2 to page 3, paragraph 4, also judgement circuits 17,27 & 37	1
X	US 5880775 Videofaxx Inc - see abstract	1

X Document indicating lack of novelty or inventive step
Y Document indicating lack of inventive step if combined with one or more other documents of same category.
& Member of the same patent family

A Document indicating technological background and/or state of the art
P Document published on or after the declared priority date but before the filing date of this invention.
E Patent document published on or after, but with priority date earlier than, the filing date of this application.